

Environmental Management - Grand Junction Office



Environmental Air Monitoring Data
Quarterly Report for the Moab and
Crescent Junction, Utah, Sites
Fourth Quarter 2010
(October through December 2010)

March 2011



U.S. Department
of Energy

Office of Environmental Management

**Moab UMTRA Project
Environmental Air Monitoring Data
Quarterly Report for the Moab and Crescent Junction, Utah, Sites
Fourth Quarter 2010
(October through December 2010)**

March 2011

**Moab UMTRA Project
Environmental Air Monitoring Data
Quarterly Report for the Moab and
Crescent Junction, Utah, Sites
Fourth Quarter 2010**

Revision 0

Review and Approval

Edward B. Baker

Edward B. Baker
RAC Environmental Compliance Manager

March 7, 2011

Date

Lawrence M. Brede

Lawrence M. Brede
RAC Project Manager

3/7/11

Date

Revision History

Revision No.	Date	Reason/Basis for Revision
0	March 2011	Initial issue.

Table of Contents

Section	Page
Acronyms and Abbreviations	iv
1.0 Summary of Results.....	1
1.1 Moab, Utah, Site	1
1.2 Crescent Junction, Utah, Site	5
1.3 Employee Monitoring for Job Site Radiation Exposure	6
2.0 Data Assessment.....	6
2.1 Data Assessment Summary.....	6
2.2 Employee Radiological Monitoring.....	11
3.0 Environmental Air Monitoring Data	11
3.1 Environmental Air Monitoring Data Summary	11
3.2 Employee Radiological Monitoring Data Summary.....	12
4.0 References.....	15

Figures

Figure 1. Off-site Radon, Direct Gamma, and Radioparticulate Monitoring Locations.....	3
Figure 2. On-site Radon, Direct Gamma, and Radioparticulate Monitoring Locations	4
Figure 3. Sampling Location Map for the Crescent Junction Site	9
Figure 4. Moab Radioparticulate Concentration (Po-210).....	16
Figure 5. Moab Radioparticulate Concentration (Th-230).....	17
Figure 6. Moab Radioparticulate Concentration (Ra-226).....	18
Figure 7. Moab Radioparticulate Concentration (Uranium)	19
Figure 8. Moab Atmospheric Radon-222 Concentration	20
Figure 9. Moab Direct Gamma Radiation Dose.....	21
Figure 10. Crescent Junction Radioparticulate Concentration (Po-210).....	22
Figure 11. Crescent Junction Radioparticulate Concentration (Th-230)	23
Figure 12. Crescent Junction Radioparticulate Concentration (Ra-226)	24
Figure 13. Crescent Junction Radioparticulate Concentration (Uranium).....	25
Figure 14. Crescent Junction Atmospheric Radon-222 Concentration.....	26
Figure 15. Crescent Junction Direct Gamma Radiation Dose.....	27

Tables

Table 1. Moab Environmental Air Monitoring Locations with Samples that Exceeded Applicable Regulatory Standards, Limits, or Guidelines During 2010.....	1
Table 2. Summary of Environmental Radon-222 and Gamma Radiation Monitoring Data for the Moab Site through fourth Quarter, Calendar Year 2010.....	2
Table 3. Summary of Radioparticulate Air Monitoring Data for the Moab Site for Calendar Year 2010	7
Table 4. Summary of Environmental Radon-222 and Gamma Radiation Monitoring Data for the Crescent Junction Site through Fourth Quarter, Calendar Year 2010.....	8
Table 5. Summary of Radioparticulate Air Monitoring Data for the Crescent Junction Site Through Fourth Quarter, Calendar Year 2010.....	10

Acronyms and Abbreviations

ALARA	as low as reasonably achievable
DCG	Derived Concentration Guideline
DOE	U.S. Department of Energy
DOE O	U.S. Department of Energy Order
EPA	Environmental Protection Agency
MEI	maximally exposed individual
mrem/qtr	millirems per quarter
mrem/yr	millirems per year
pCi/L	picocuries per liter
RIN	report identification number
TLD	thermoluminescent dosimeter
UMTRA	Uranium Mill Tailings Remedial Action

1.0 Summary of Results

1.1 Moab, Utah, Site

Sampling Period: October through December 2010

Atmospheric Radon-222

U.S. Department of Energy (DOE) Order (O) 5400.5, "Radiation Protection of the Public and Environment," establishes a guideline for atmospheric emissions of radon-222 that is applicable to the Moab Uranium Mill Tailings Remedial Action (UMTRA) Project. This guideline is 3.0 picocuries per liter (pCi/L) above background. Based on 5 years of data from 2003 through 2008, background concentrations of radon-222 in the Moab area have been established at 0.7 pCi/L; therefore, the guideline for radon-222 emissions at the Moab site is 3.7 pCi/L. Monitoring data collected during the fourth quarter of 2010 indicate that this guideline was exceeded at one on-site monitoring location, station 0106. The DOE guideline concentration was not exceeded at any off-site locations during the fourth quarter. In general, fourth quarter results were lower than 2009 fourth quarter data for locations near or on the mill site (one versus three exceedances of guideline), and remote locations were similar to historical data. Refer to Tables 1 and 2 for a review of radon-222 data for the Moab site. Sample locations for the Moab site are presented in Figures 1 and 2.

Table 1. Moab Environmental Air Monitoring Locations with Samples that Exceeded Applicable Regulatory Standards, Limits, or Guidelines During 2010

Analyte	Standard/Guideline	Sample Locations Exceeding Quarterly Standards/Guidelines During Fourth Quarter 2010	Sampling Locations Exceeding Annual Standards/Guidelines During 2010
Radon-222	3.7 pCi/L	0106	0106
Direct Gamma Radiation	182 mrem/yr (45.5 mrem/qtr)	0105, 0106, 0108, 0109, 0110, 0112	0106, 0109, 0110, 0112

mrem/yr = millirems per year; mrem/qtr = millirems per quarter

Direct Environmental Gamma Radiation

DOE O 5400.5 establishes a dose limit of 100 millirems per year (mrem/yr) above naturally occurring gamma levels (background). Background gamma radiation for the Moab area has been established at 82 mrem/yr; therefore, the gamma dose limit for the Moab site is 182 mrem/yr (45.5 mrem/quarter [qtr]). Based on the monitoring data collected during the fourth quarter of 2010, six on-site monitoring locations exceeded the quarterly gamma dose limit, and no off-site monitoring location exceeded the quarterly gamma radiation dose limit. Fourth quarter analytical results were higher than the third quarter, especially stations 0106, 0108, and 0109 (located near the tailings pile excavation). The results have been elevated since pile excavation in the second quarter of 2009 and indicates tailing pile influence within the DOE property as expected. Refer to Tables 1 and 2 for a review of gamma data for the Moab site.

Radon-222 and Direct Gamma Conclusion

Although the exposure rates (direct gamma) exceeded the annual standards/guidelines at one location on the DOE site property, this does not reflect elevated doses to the public. These data represent the exposure that a member of the public could receive if he or she resided at the point where the data were collected for an entire year. This is not a realistic representation of actual or expected public exposure conditions, because no member of the public permanently resides at or near these locations. Monitoring data observed at the maximally exposed individual (MEI) location, just east of the Moab site, represent the greatest potential exposure to a member of the public. Radon and gamma dose limits established by DOE were not exceeded at the MEI location.

Table 2. Summary of Environmental Radon-222 and Gamma Radiation Monitoring Data for the Moab Site through Fourth Quarter, Calendar Year 2010

Station Number	1st Quarter 2010		2nd Quarter 2010		3rd Quarter 2010		4th Quarter 2010		2010 Annual	
	Radon pCi/L	Gamma mrem/91 d ³	Average Radon pCi/L	Total Gamma mrem/yr						
On-site Locations										
0101	1.4	32.2	1.1	31.1	2.4	35.3	3.1	39.3	2.0	137.88
0102	1.0	21.7	0.6	21.8	0.9	23.4	1.6	28.1	1.0	94.96
0103	0.8	21.9	0.7	20.5	0.9	23.0	1.8	27.0	1.1	92.4
0104	1.2	24.6	1	23.3	1.4	26.9	2.1	31.0	1.4	105.83
0105	1.9	41.1	1.2	43.3	2.0	46.6	2.8	47.6	2.0	178.58
0106	2.3	41.4	2	43.7	2.8	48.1	4.5	56.7	2.9	189.95
0107	1.9	25.3	1.6	27	2.2	28.2	3.1	35.0	2.2	115.54
0108	1.4	32.7	1.6	36.2	2.3	40.1	3.6	46.8	2.2	155.75
0109	1.2	89.9	1.4	105.4	3.1	120.1	2.1	132.6	2.0	447.99
0110	1.1	78	1.6	82.3	2.8	96.8	2.0	87.4	1.9	344.48
0111	0.6	32.6	1.2	30.4	1.0	38.0	0.9	35.7	0.9	136.76
0112	1.2	40.9	1.4	42.2	2.9	50.1	3.1	49.8	2.2	182.97
0113	1.4	28.4	1.5	29.1	2.8	30.6	3.1	35.9	2.2	124.04
Off-site Locations										
0117 ¹	0.9	20.5	0.5	20.3	<0.3	22.7	0.4	24.2	0.5	87.76
0118	0.4	20.1	0.4	20.2	0.5	20.6	1.0	24.9	0.6	85.81
0119 ²	0.7	18.7	0.5	21.2	0.5	19.3	0.7	26.1	0.6	85.24
0120	0.8	18	0.4	18.1	<0.3	18.7	0.3	24.9	0.5	79.72
0121	0.9	20.3	0.5	19.6	0.4	20.3	0.6	24.4	0.6	84.51
0122	0.5	19	0.6	17.9	<0.3	19.4	0.8	20.9	0.6	77.28
0123 ¹	0.6	18.7	<0.3	17.5	0.4	20.2	<0.3	21.3	0.4	77.67
0124	0.8	21.7	0.7	23.7	0.8	23.2	1.2	29.5	0.9	98.12
0125	1.1	25	0.8	25.6	1.1	27.6	1.5	33.3	1.1	111.52
0126	1.1	21.7	0.7	22.4	1.2	24.5	2.1	28.7	1.3	97.3
0127	0.8	21.1	0.5	23.2	0.5	23.5	1.0	27.9	0.7	95.78
0128	1.5	22	1.1	22.5	1.3	25.7	2.6	27.6	1.6	97.73
0129	1.2	21.7	1.2	24.4	1.8	24.9	NDA	30.0	1.1	101
MEI ²	0.7	18.6	0.5	17.4	1.0	19.3	1.9	22.2	1.0	77.5

NDA= no data available (vandalized or missing).

¹Designated background monitoring locations. Background locations are sufficiently distant from the millsite to be free of any influences from potential site contaminants.

²The MEI is the continually occupied residential property that is closest to the DOE property boundary.

³mrem value is prorated to a 91-day exposure period.

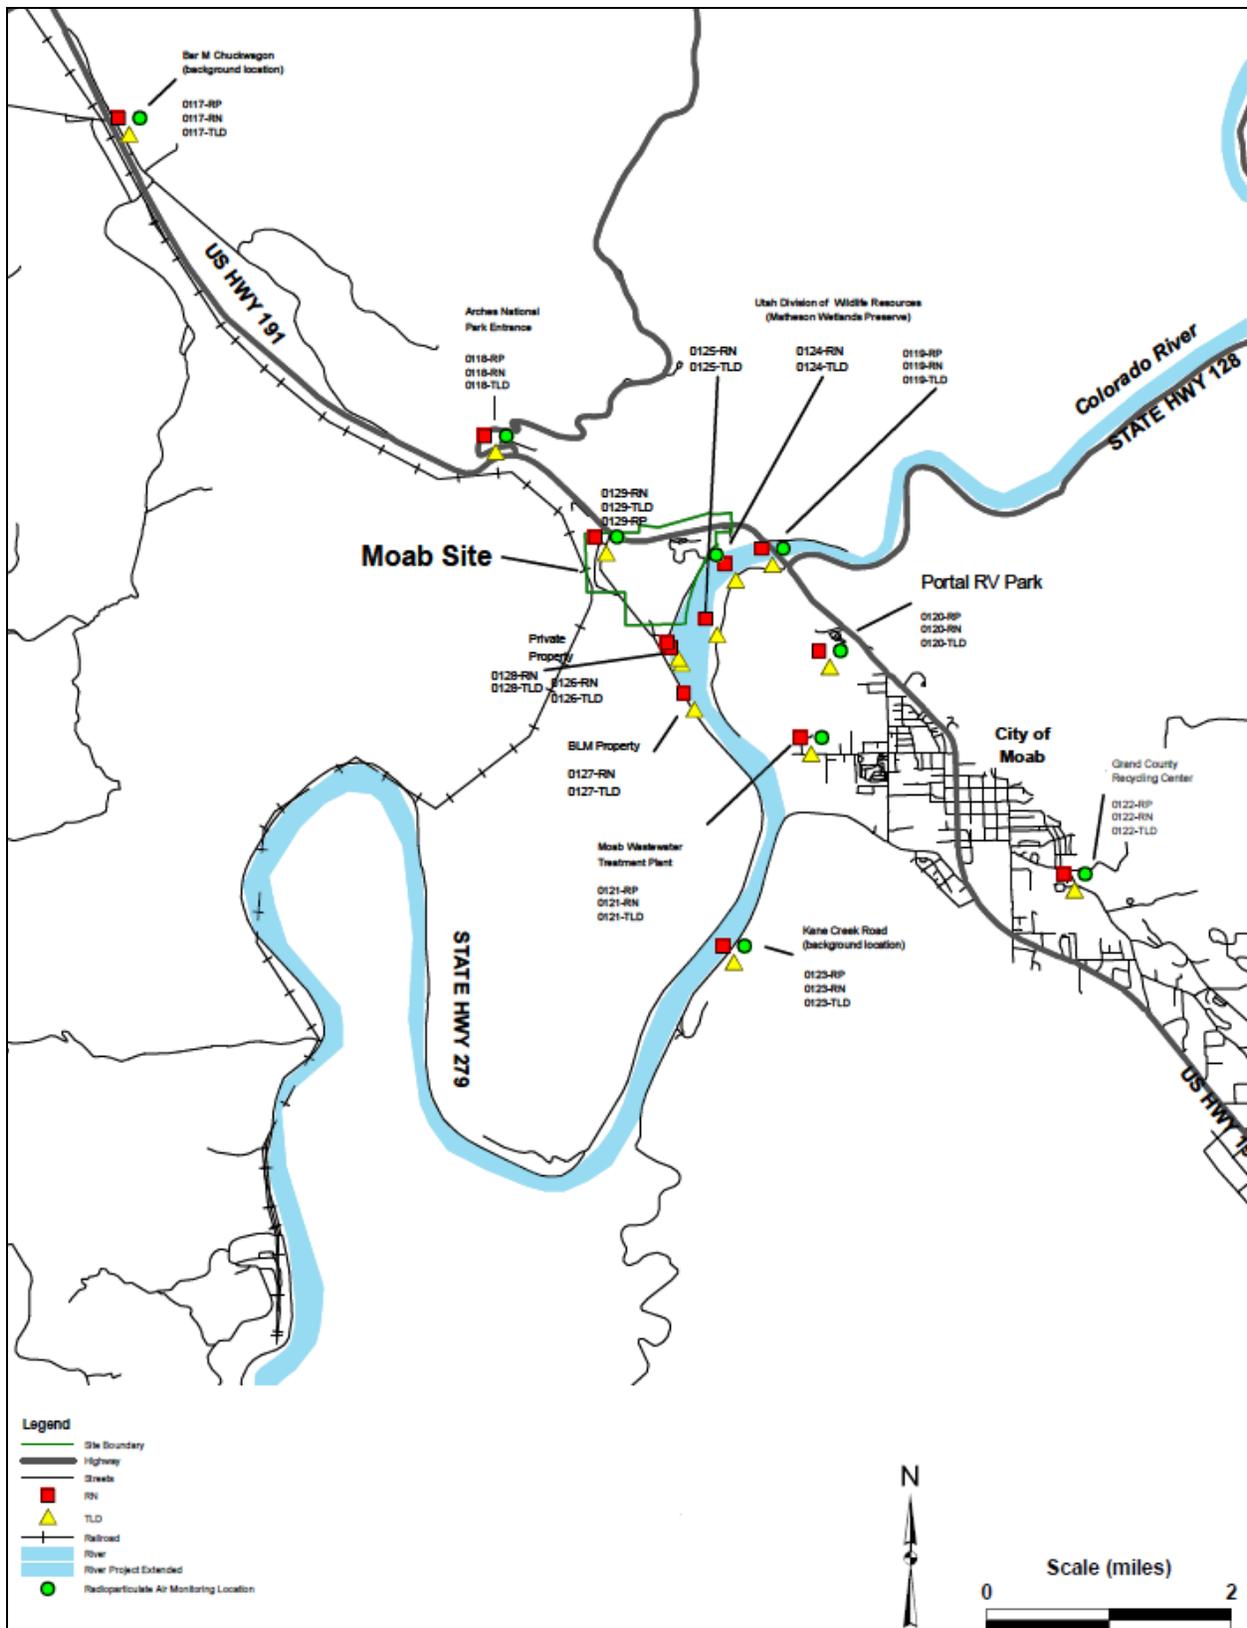


Figure 1. Off-site Radon, Direct Gamma, and Radioparticulate Monitoring Locations

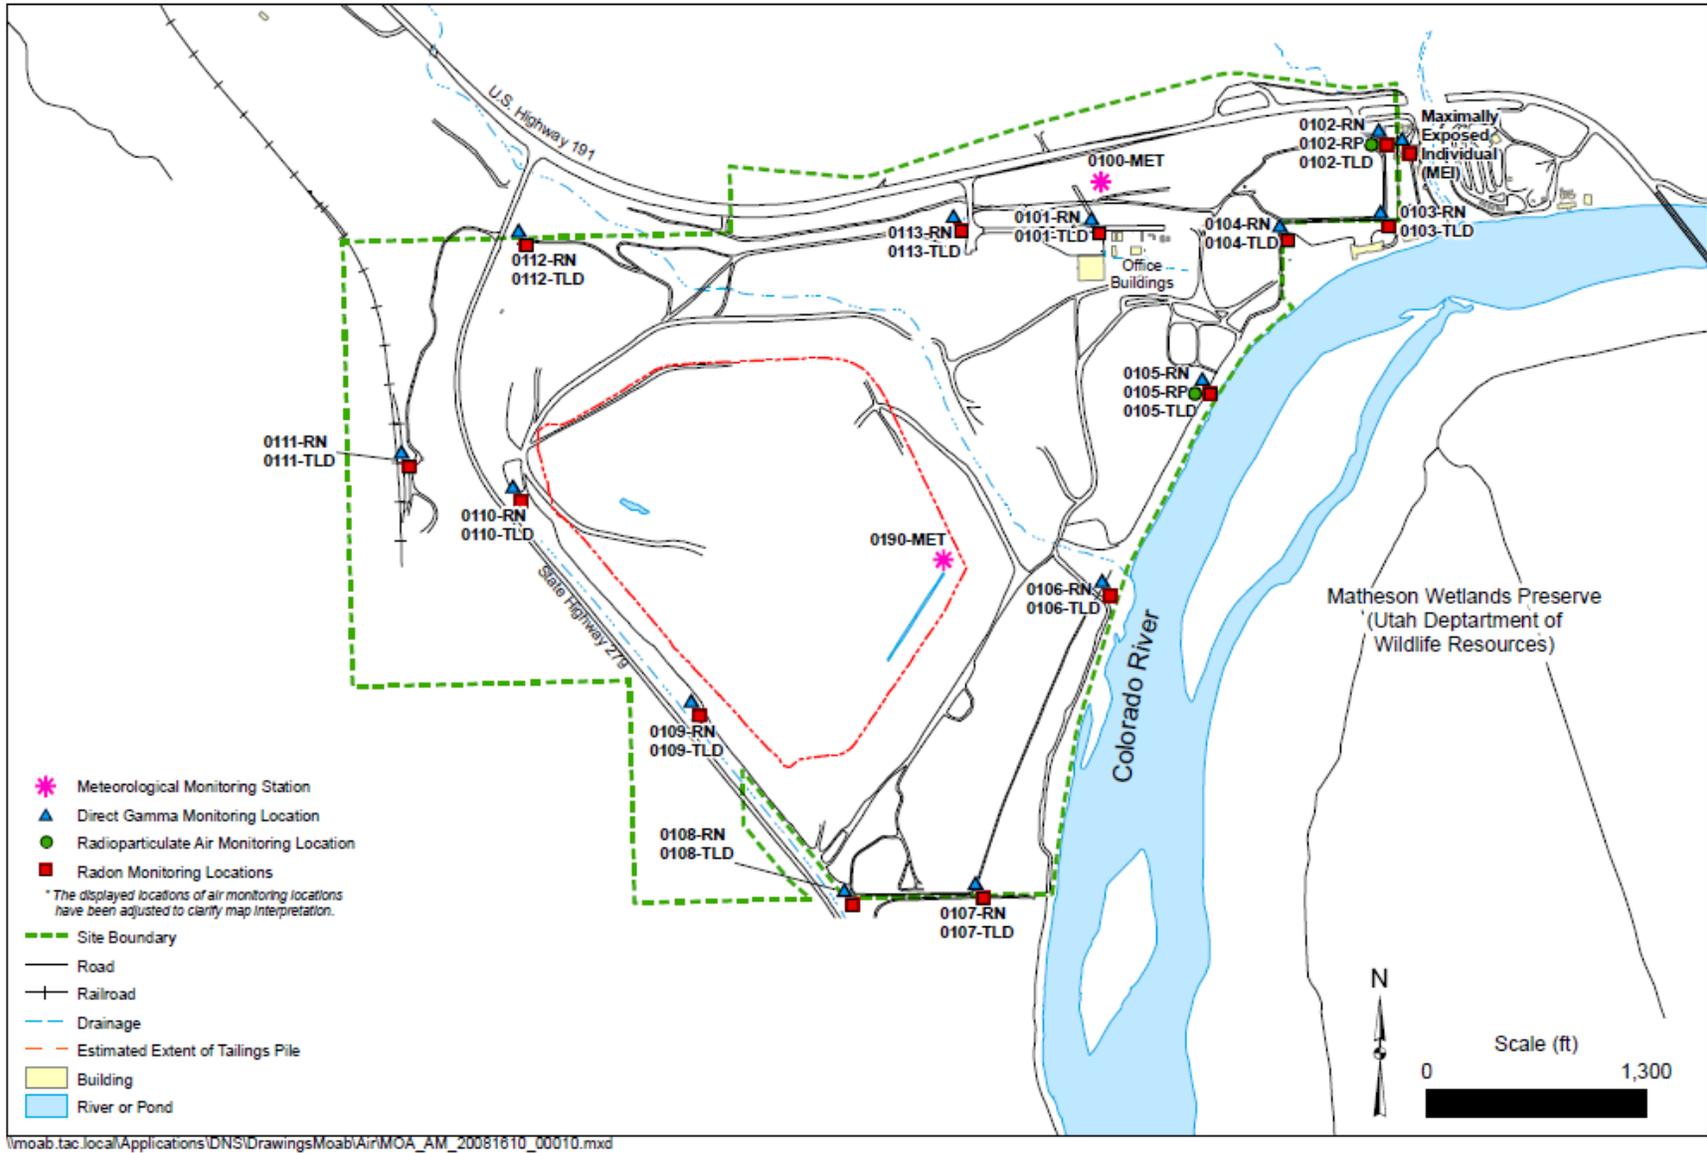


Figure 2. On-site Radon, Direct Gamma, and Radioparticulate Monitoring Locations

Radioparticulates

No standards or radiological exposure limits were exceeded at any of the 10 radioparticulate monitoring locations at the Moab site during the fourth quarter of 2010. Analytical data for all analytes (radium-226, thorium-230, polonium-210, and total uranium) were below their respective derived concentration guidelines (DCGs), as found in DOE O 5400.5. Concentrations of the radioparticulates have been consistently below DCGs since DOE assumed ownership of the site in 2001. DOE O 5400.5 also requires that the radiological dose resulting from airborne emissions is less than 10 mrem/yr. All off-site sampling results were lower than the DOE DCG value of 10 mrem/yr.

During the fourth quarter of 2010, the on-site dose resulting from airborne emissions, excluding background, was 1.79 mrem/yr at location 0102 and 3.16 mrem/yr at location 0105. Nearby off-site locations 0117 and 0129 were 1.12 mrem/yr and 6.77 mrem/yr, respectively. Station 0129 is immediately downwind of the operations. Although results are below the guideline, stations closer to the operations (0105 and 0129) indicate higher results than more remote stations (0102 and 0117). Refer to Table 3 for a review of radioparticulate air monitoring data for the Moab site.

1.2 Crescent Junction, Utah, Site

Sampling Period: October through December 2010

Atmospheric Radon-222

DOE O 5400.5 establishes a guideline for atmospheric emissions of radon-222 that will be applicable to the Crescent Junction site (3.0 pCi/L above background). Shipment of uranium mill tailings to the Crescent Junction disposal cell commenced in the second quarter of 2009. Based on 3 years of data from 2006 through 2009, background concentrations of radon-222 in the Crescent Junction area have been established at 0.9 pCi/L; therefore, the guideline for radon-222 emissions at the Crescent Junction site is 3.9 pCi/L. During the fourth quarter of 2010, none of the on-site or off-site stations exceeded the guideline. Sample locations for the Crescent Junction site are presented in Figure 3. Radon-222 and direct gamma radiation for the Crescent Junction site are summarized in Table 4, and radioparticulate data for the Crescent Junction site are summarized in Table 5.

Direct Environmental Gamma Radiation

DOE O 5400.5 establishes a dose limit of 100 mrem/yr above naturally occurring gamma levels (background). The gamma dose limit for the Crescent Junction site is 192.5 mrem/yr (48.1 mrem/qtr) based on background data from all stations for 2006 to 2009. During the fourth quarter of 2010, none of the on-site or off-site stations exceeded the annual or quarterly gamma radiation dose limit. Refer to Table 5 for a review of gamma data for the Crescent Junction site.

Radioparticulates

DOE O 5400.5 establishes DCGs for concentrations of radioparticulates in air. Concentrations of the radioparticulates have been consistently below DCGs since DOE assumed ownership of the site in 2006. During the fourth quarter of 2010, the on-site dose resulting from airborne emissions, including background, was 1.04 mrem/qtr or 7.31 mrem/yr at location 0308. The significant increase was noted at 0308 starting the second quarter of 2010. Extensive disposal activities were conducted starting the second quarter near this station. This elevated dose is not

an exceedance; however, if the second and fourth quarter doses continued for the year, the DOE guideline of 10 mrem/yr would be exceeded and engineering controls would be implemented to reduce the level of radioparticulates. All other Crescent Junction station results were similar to past data; for example, 1.12 mrem/yr was noted at off-site location 0306 or the MEI. Refer to Table 5 for a review of radioparticulate air monitoring data for the Crescent Junction site.

1.3 Employee Monitoring for Job Site Radiation Exposure

In addition to the environmental air monitoring program around the perimeter of the work sites, an employee monitoring program is also conducted. External radiation monitoring of employees who enter the contamination area is performed using a thermoluminescent dosimeter (TLD). Personal electronic dosimeters are also used to give real-time monitoring of the workers in the radiological contamination area.

The project's as low as reasonably achievable (ALARA) goal for individual exposures is 700 mrem/yr. The project ALARA goal is very conservative when compared to the DOE exposure limit of 2,000 mrem/yr and the Nuclear Regulatory Commission limit of 5,000 mrem/yr. Initial radiation results indicate that with proper personal protective equipment and limiting exposure, employees can safely work within the Contamination Area.

Employees will continue to be carefully monitored to ensure safe working conditions are maintained. On-site radiation readings are higher than off-site locations; therefore, the contamination area workers represent the highest potentially exposed individuals.

The 2009 monitoring results were well below the ALARA goal, with the highest individual radiological worker dose being approximately 167 mrem/yr versus 20 mrem/yr in 2008 prior to excavation of the mill tailings.

In the fourth quarter of 2010, the highest individual dose was 68 mrem, which equates to an annualized dose of 272 mrem/yr. The average individual (all employees) dose was 11.1 mrem or 44.4 mrem/yr. For individuals receiving greater than 10 mrem, the dose was 25 mrem or 100 mrem/yr.

2.0 Data Assessment

2.1 Data Assessment Summary

Atmospheric Radon-222 Analyses

Radon detectors were analyzed by Landauer Inc., in accordance with Landauer's *Quality Assurance Manual for Radon Monitoring Services* (March, 2004). Fourth quarter 2010 analytical radon-222 data were received in a report dated January 18, 2011. Unlike radioparticulate analyses, radon-222 data are not reported with qualifiers from the laboratory. When detectors were either missing, damaged, or could not be read, the laboratory noted an explanation for the stations. After the data report was received, the data were evaluated for consistency with other data points and sample duplicates.

Table 3. Summary of Radioparticulate Air Monitoring Data for the Moab Site for Calendar Year 2010

Station Number	Isotope	1st Quarter 2010 (μCi/mL)	2nd Quarter 2010 (μCi/mL)	3rd Quarter 2010 (μCi/mL)	4th Quarter 2010 (μCi/mL)	Annual Average (μCi/mL)
On-site Locations						
0102-RP	Uranium ¹	1.30E-16	2.0E-16	2.1E-16	1.6E-16	1.7E-16
	Thorium-230 ²	7.00E-17	2.1E-16	5.8E-16	3.7E-16	2.6E-16
	Radium-226 ³	8.40E-17	5.5E-17	2.4E-16	1.7E-16	1.3E-16
	Polonium-210 ⁴	2.00E-14	4.4E-15	8.1E-15	7.3E-15	1.2E-14
0105-RP	Uranium ¹	2.70E-16	4.7E-16	4.7E-16	3.5E-16	3.7E-16
	Thorium-230 ²	2.20E-16	6.1E-16	1.3E-15	1.2E-15	7.1E-16
	Radium-226 ³	2.40E-16	8.8E-17	9.0E-16	5.7E-16	4.1E-16
	Polonium-210 ⁴	1.80E-14	4.6E-15	8.5E-15	9.4E-15	1.2E-14
Off-site Locations						
0117-RP	Uranium ¹	1.00E-16	1.6E-16	1.4E-16	1.3E-16	1.3E-16
	Thorium-230 ²	6.20E-17	9.6E-17	8.9E-17	8.7E-17	7.9E-17
	Radium-226 ³	7.40E-17	4.5E-17	1.1E-16	1.3E-16	8.8E-17
	Polonium-210 ⁴	1.80E-14	3.9E-15	7.5E-15	6.3E-15	1.1E-14
0118-RP	Uranium ¹	1.30E-16	2.4E-16	2.6E-16	1.5E-16	1.8E-16
	Thorium-230 ²	1.40E-16	6.6E-16	1.0E-15	3.3E-16	4.5E-16
	Radium-226 ³	5.70E-17	1.4E-16	8.8E-16	3.0E-16	2.9E-16
	Polonium-210 ⁴	2.00E-14	5.5E-15	8.4E-15	7.3E-15	1.2E-14
0119-RP	Uranium ¹	1.40E-16	1.9E-16	1.6E-16	1.4E-16	1.5E-16
	Thorium-230 ²	6.80E-17	1.7E-16	2.5E-16	1.6E-16	1.4E-16
	Radium-226 ³	9.70E-17	2.6E-17	1.6E-16	2.0E-16	1.2E-16
	Polonium-210 ⁴	1.60E-14	4.3E-15	7.3E-15	8.2E-15	1.0E-14
0120-RP	Uranium ¹	1.40E-16	2.0E-16	1.6E-16	1.5E-16	1.6E-16
	Thorium-230 ²	8.40E-17	1.7E-16	1.6E-16	2.0E-16	1.4E-16
	Radium-226 ³	4.40E-17	5.1E-17	1.4E-16	1.6E-16	8.8E-17
	Polonium-210 ⁴	2.10E-14	4.3E-15	7.7E-15	7.0E-15	1.2E-14
0121-RP	Uranium ¹	1.40E-16	1.9E-16	1.7E-16	1.4E-16	1.6E-16
	Thorium-230 ²	1.20E-16	1.3E-16	2.2E-16	2.1E-16	1.6E-16
	Radium-226 ³	2.40E-16	2.5E-17	2.4E-16	1.7E-16	1.8E-16
	Polonium-210 ⁴	2.00E-14	3.8E-15	7.1E-15	7.2E-15	1.2E-14
0122-RP	Uranium ¹	1.50E-16	2.1E-16	1.5E-16	1.3E-16	1.6E-16
	Thorium-230 ²	1.60E-16	8.9E-17	1.2E-16	1.4E-16	1.3E-16
	Radium-226 ³	1.10E-16	8.5E-17	2.1E-16	1.6E-16	1.3E-16
	Polonium-210 ⁴	1.80E-14	4.3E-15	6.6E-15	6.6E-15	1.1E-14
0123-RP	Uranium ¹	1.10E-16	2.0E-16	1.3E-16	1.2E-16	1.4E-16
	Thorium-230 ²	7.60E-17	1.1E-16	1.7E-16	2.0E-16	1.3E-16
	Radium-226 ³	8.40E-17	5.4E-17	5.4E-17	1.0E-16	8.4E-17
	Polonium-210 ⁴	2.10E-14	3.8E-15	7.3E-15	7.6E-15	1.2E-14

Table 3. Summary of Radioparticulate Air Monitoring Data for the Moab Site for Calendar Year 2010 (continued)

Station Number	Isotope	1st Quarter 2010 (μCi/mL)	2nd Quarter 2010 (μCi/mL)	3rd Quarter 2010 (μCi/mL)	4th Quarter 2010 (μCi/mL)	Annual Average (μCi/mL)
Off-site Locations (continued)						
0129-RP	Uranium ¹	3.10E-16	6.4E-16	8.4E-16	3.8E-16	5.0E-16
	Thorium-230 ²	5.00E-16	2.0E-15	4.6E-15	1.6E-15	1.8E-15
	Radium-226 ³	3.60E-16	6.5E-18	2.2E-15	7.7E-16	7.5E-16
	Polonium-210 ⁴	2.10E-14	6.9E-15	1.2E-14	9.0E-15	1.4E-14

¹DOE DCG for total uranium = 2.E-12

²DOE DCG for thorium-230 = 4.E-14

³DOE DCG for radium-226 = 1.E-12

⁴DOE DCG for polonium-210 = 1.E-12

μCi/mL = microcuries per milliliter

Table 4. Summary of Environmental Radon-222 and Gamma Radiation Monitoring Data for the Crescent Junction Site through Fourth Quarter, Calendar Year 2010

Station Number	1st Quarter 2010		2nd Quarter 2010		3rd Quarter 2010		4th Quarter 2010		2010 Annual	
	Radon pCi/L	Gamma mrem ¹	Average Radon pCi/L	Total Gamma mrem/yr						
0301	0.8	21.8	0.7	23.3	0.5	24.1	0.6	24.1	0.7	93.3
0302²	0.6	20.9	0.7	23.2	NDA	25.2	<0.3	26.5	0.4	95.8
0303	0.9	23.0	1	24.4	0.6	26.5	0.5	27.4	0.8	101.4
0304	1.1	24.7	0.9	22.5	0.5	28.7	0.7	25.7	0.8	101.6
0305	1.0	25.3	0.8	24.9	0.5	28.9	0.8	27.7	0.8	106.9
0306	0.8	25.9	0.5	24.7	0.4	27.7	0.5	26.9	0.6	105.2
0307	0.9	24.7	0.3	25.2	<0.3	29.2	0.7	28.1	0.5	107.2
0308	0.7	17.3	0.4	20	2.0	20.3	1.3	25.2	1.1	82.8
0309	1.0	23.3	0.7	24.4	0.8	24.3	0.7	25.9	0.8	97.9

NDA= No Data Available

¹Processing irregularity

²Radon cup found on ground

Direct Environmental Gamma Radiation Analyses

TLDs are used for continuous dose measurements and are analyzed by Environmental, Inc., Midwest Laboratory in accordance with their analytical procedure *Preparation and Readout of Teledyne Isotopes TLD Card, TIML-TLD-01* (Teledyne Isotopes, 2001). Fourth quarter 2010 environmental gamma radiation data were received in a report dated January 12, 2011. After the laboratory results were received, the data were evaluated for consistency and compared to historic data and duplicates.

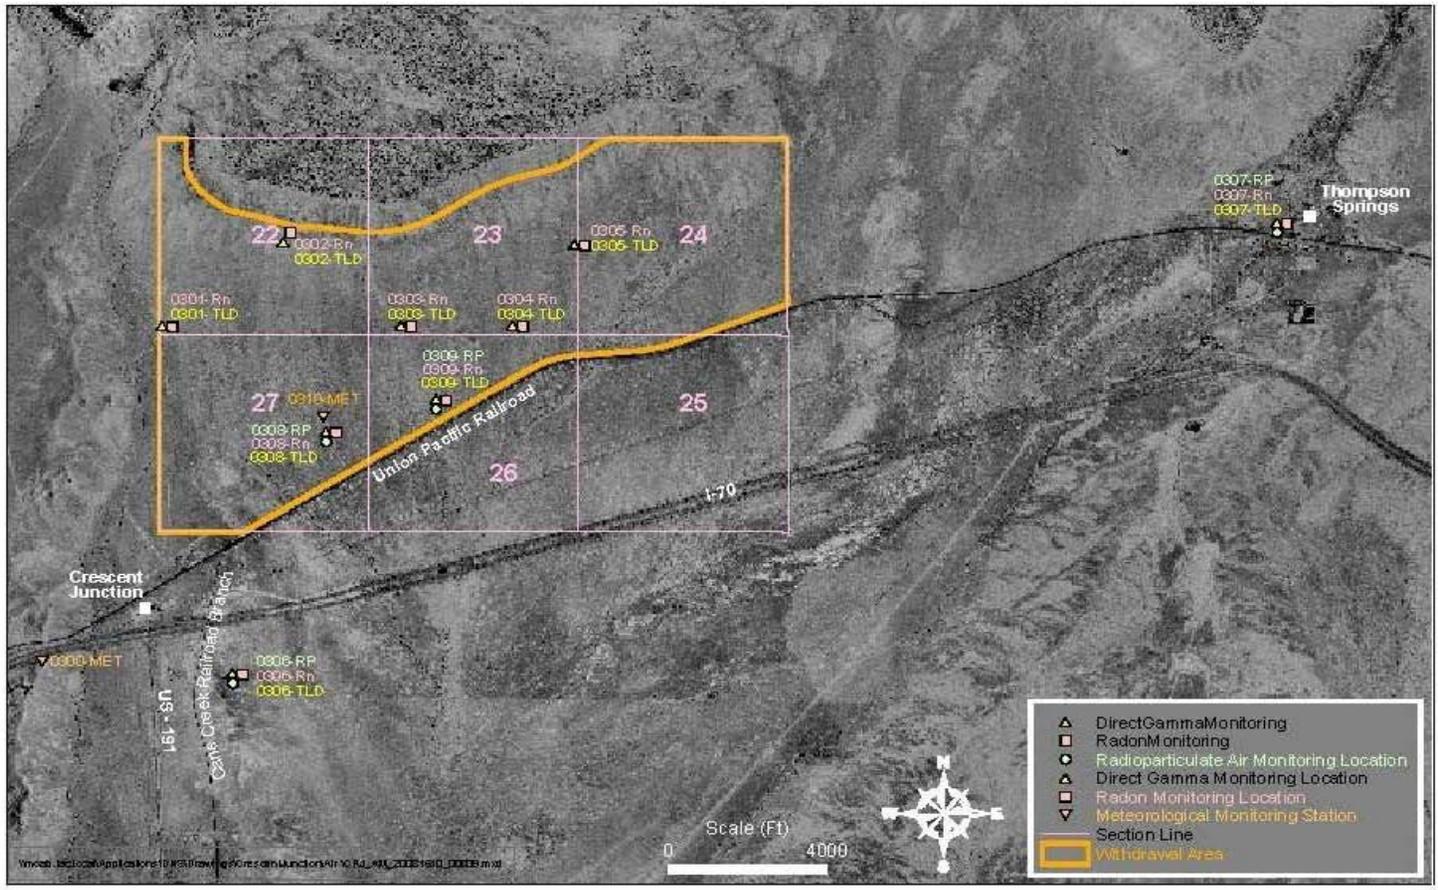


Figure 3. Sampling Location Map for the Crescent Junction Site

Table 5. Summary of Radioparticulate Air Monitoring Data for the Crescent Junction Site through Fourth Quarter, Calendar Year 2010

Station Number	Isotope	1st Quarter 2010 (μCi/mL)	2nd Quarter 2010 (μCi/mL)	3rd Quarter 2010 (μCi/mL)	4th Quarter 2010 (μCi/mL)	Annual Average (μCi/mL)
0306-RP	Uranium ¹	1.00E-16	1.30E-16	1.1E-16	1.10E-16	1.10E-16
	Thorium-230 ²	2.80E-17	1.30E-16	1.1E-16	1.40E-16	8.60E-17
	Radium-226 ³	5.30E-17	4.30E-17	1.6E-16	6.50E-17	7.40E-17
	Polonium-210 ⁴	1.60E-14	4.40E-15	6.9E-15	6.70E-15	1.00E-14
0307-RP	Uranium ¹	1.40E-16	1.50E-16	1.9E-16	1.10E-16	1.40E-16
	Thorium-230 ²	4.90E-17	9.40E-17	1.0E-16	8.80E-17	7.70E-17
	Radium-226 ³	1.20E-16	2.90E-17	1.2E-16	4.10E-18	8.00E-17
	Polonium-210 ⁴	1.50E-14	4.30E-15	6.7E-15	6.10E-15	9.20E-15
0308-RP	Uranium ¹	4.00E-16	8.70E-16	9.4E-16	3.70E-16	5.60E-16
	Thorium-230 ²	4.10E-16	3.80E-15	4.3E-15	1.30E-15	1.80E-15
	Radium-226 ³	4.90E-16	1.00E-15	2.1E-15	6.40E-16	8.60E-16
	Polonium-210 ⁴	1.40E-14	8.20E-15	1.1E-14	8.30E-15	1.20E-14
0309-RP	Uranium ¹	2.10E-16	2.70E-16	2.1E-16	1.90E-16	2.20E-16
	Thorium-230 ²	1.50E-16	6.00E-16	5.0E-16	4.80E-16	3.40E-16
	Radium-226 ³	8.40E-17	2.00E-16	2.0E-16	2.10E-16	1.50E-16
	Polonium-210 ⁴	1.50E-14	4.60E-15	7.2E-15	7.10E-15	1.00E-14

¹DOE DCG for Total Uranium = 2.E-12

²DOE DCG for Thorium-230 = 4.E-14

³DOE DCG for Radium-226 = 1.E-12

⁴DOE DCG for Polonium-210 = 1.E-12

μCi/mL = microCuries per milliliter

Radioparticulate Analyses

ALS Laboratory Group in Fort Collins, Colorado, analyzed the radioparticulate samples for radium-226, thorium-230, polonium-210, and total uranium. Results for the fourth quarter 2010 sampling period are in Report Identification Number (RIN) 1101022. Polonium-210 and isotopic thorium (includes thorium-230) were analyzed by alpha spectroscopy, method PA-SOP714R10. Radium-226 was analyzed by radon emanation methods, U.S. Environmental Protection Agency (EPA) method 903.1(m). Total uranium was analyzed by inductively coupled plasma-mass spectrometry, EPA method SW-846 6020A, procedure PA SOP827, Revision 5. Radioparticulate analytical data for samples collected during the fourth quarter of 2010 were received January 3, 2011, and were reviewed, validated, and summarized in the *Data Review and Validation Report for RIN 1101002* dated February 21, 2011.

Field Activities

Duplicate samples for radon-222 monitoring were collected at three locations: (1) 0108, an on-site location at the southern property line of the Moab site; (2) 0111, an on-site location at the western property line near the rail load-out location; and (3) 0121, a background monitoring location approximately 2 miles southeast of the Moab site. Duplicate measurements of direct gamma were made at two Moab locations: (1) 0108, an on-site location with consistently elevated readings; and (2) 0129, an off-site location near the property boundary. Duplicate radon-222 measurements were made at Crescent Junction locations 0303 and 0308. Duplicate direct gamma measurements were made at Crescent Junction locations 0301.

Duplicates are not being collected for radioparticulate samples per the *Environmental Air Monitoring Sampling and Analysis Plan* (DOE-EM/GJRAC1434). All of the radioparticulate isotopes collected to date are below their respective DCGs. Consequently, the costs associated with purchasing a duplicate sampler, providing additional electrical power, and incurring additional analytical expenses are not justified.

Suspected Anomalies

All analytical data are reviewed for anomalous or outlying data points. No anomalous data was noted for the fourth quarter. Direct gamma data was similar to historic data. The only significant data results for the fourth quarter were continued elevated gamma readings for stations 0106, 0108, 0109, and 0110 (since excavation started), which are close to the tailing pile excavation activity. The quarterly review consists of evaluating monitoring data against historical and minimum/maximum values to determine if the reported data are within reasonable expected ranges. In addition, radioparticulate validation was performed by a third party (Pro2Serve) prior to data entry (into the SeePro database).

Summary

Data collected during the fourth quarter of 2010 met the applicable laboratory control criteria for their respective analyses, and all data were reviewed by qualified personnel. The results were found to be within the acceptable limits associated with each matrix. Data reported in this environmental air monitoring report are considered validated and may be treated as final results. The checklist protocol summary of field observation for the fourth quarter of 2010 is shown in the Environmental Air Monitoring Field Activities Verification Checklist on the following pages.

2.2 Employee Radiological Monitoring

Currently, the Moab UMTRA Project external dosimetry program utilizes a TLD from Mirion Dosimetry Service. The TLDs are submitted to the analytical laboratory on a quarterly basis. The employee monitoring results presented in this report are only for the external dosimetry program. Bioassay measurements are also performed to ensure employees are not at risk. Approximately 300 employees who work directly with the mill tailings are participants in the external dosimetry program.

3.0 Environmental Air Monitoring Data

3.1 Environmental Air Monitoring Data Summary

Radon-222 and direct gamma radiation for the Moab site are summarized in Table 2 (Section 1), and radioparticulate data for the Moab site are summarized in Table 3 (Section 1). Radon-222 and direct gamma radiation for the Crescent Junction site are summarized in Table 4 (Section 2), and radioparticulate data for the Crescent Junction site are summarized in Table 5 (Section 2).

Time-concentration graphs for each analyte sampled at select Moab sites are presented in Figures 4 through 7; radon and gamma are shown in Figures 8 and 9, respectively. Time-concentration graphs for each analyte sampled at the Crescent Junction sites are presented in Figures 10 through 13, and radon and gamma in Figures 14 and 15. After mill tailings disposal began, location 0308 became the closest to operations, and 0306 became the MEI location. Location

0307, approximately 5 miles east of the disposal site, will represent the second greatest risk (second to the MEI location), and locations 0301 through 0305 and 0309 will provide property line data for the disposal site.

Time-concentration graphs have been plotted only for selected locations for each matrix. The rationale used for selecting each location is summarized below.

Radon-222 and Direct Gamma Radiation

Radon-222 and gamma radiation data have been graphed (Figures 8 and 9, respectively) for the following Moab site locations: (1) location MEI, which is considered to represent the greatest potential exposure scenario to a member of the public; (2) location 0108, which is on the southern property boundary of the Moab site and occasionally has high radon levels; (3) location 0106, which is along the southeastern property boundary and has recorded high direct gamma radiation; (4) location 0129 directly downwind of operations; (5) location 0117, which is approximately 5 miles northwest of the Moab site property and is a background monitoring location; and (6) location 0120, which is near the Portal RV Park, approximately 1 mile southeast of the Moab site, and represents a second potential exposure to the public. At Crescent Junction locations 0302 (close to the north side of operations), 0306 and 0307 (closest to members of the public) and 0308 and 0309 (close to the south side of operations and downwind respectively) are graphed in Figures 14 and 15.

Radioparticulates

Radioparticulate monitoring data have been graphed (Figure 4 through 7) for the following Moab site locations: (1) location 0102, one of two on-site radioparticulate monitoring locations, is the radioparticulate sampling location closest to the MEI; (2) location 0105, which is closest to the emissions source (i.e., the mill tailings pile) and is at the site freshwater pond adjacent to the Colorado River and the Matheson Wetlands Preserve; (3) location 0129 is directly downwind of operations (4) location 0117 (near the Bar-M Chuckwagon), which is a background monitoring location approximately 5 miles northwest of the Moab site property and represents ambient or naturally occurring conditions; and (5) location 0120 (near the Portal RV Park), which is approximately 1 mile southeast of the Moab site and represents a location between the site and Moab for off-site exposure to the public. At Crescent Junction locations 0306 and 0307 are off-site stations closest to members of the public; also locations 0308 and 0309 (on site) are graphed (Figures 10 through 13).

3.2 Employee Radiological Monitoring Data Summary

		<u>2009</u>	<u>4th Quarter 2010</u>
Number of Employees Monitored	290		313
Highest Individual Project Dose	167	mrem/yr.	68 mrem/qtr
Average Moab UMTRA Project Dose		13.3 mrem/yr.	11.1 mrem/qtr

Environmental Air Monitoring Field Activities Verification Checklist

Project	<u>Moab/Crescent Junction, Utah</u>	Date(s) of Air Sampling	<u>October through December 2010</u>
Date(s) of Verification	<u>November 22, 2010</u>	Name of Verifier	<u>Ed Baker/Melvin Capitan</u>
	Response (Yes, No, NA)	Comments	
1. Is the Sampling and Analysis Plan the primary document directing field procedures?	Yes		
2. Were the sampling locations specified in the Sampling and Analysis Plan?	Yes		
3. Were low-volume air samplers on and operating at or near 60 liters/minute ± 10%?	Yes		
4. Did any of the samplers require airflow adjustment?	No	All pumps were recalibrated to 60 liters/minute both at the beginning and the end of the sampling period.	
5. Were detectors (radon cups, TLDs) and monitoring equipment found to be undisturbed and in operable condition upon arrival?	No	Radon cup at 0129 was vandalized and missing.	
6. Were the hourly clocks on the low-volume air samplers operational upon arrival?	No	Replaced timers on 0119 and 0120 in October.	
7. Were the run times recorded for each radioparticulate monitoring location?	Yes		
8. Were duplicates (for radon-222 and gamma radiation) taken at a frequency of one per 20 samples?	Yes		
9. Were filter blanks (for radioparticulates) taken at a frequency of one per 20 samples?	No	Not required per the Sampling and Analysis Plan.	
10. Were trip blanks (for radon-222 and gamma radiation) included with each shipment?	No	A trip blank is not used for the radon-222 monitoring because units are sealed; however, a trip blank was used for the direct gamma radiation monitoring.	
11. Was the identity of the quality-control sample locations protected?	Yes		
12. Were the true locations of the quality-control samples recorded in the Field Log Book?	Yes		
13. Were all samples collected as specified in the Sampling and Analysis Plan?	Yes		
14. Were chain of custody records completed, and was sample custody maintained?	Yes		
15. Are field data sheets signed and dated by sampling personnel?	Yes		
16. Was all other pertinent information documented on the field data sheets?	Yes		

Environmental Air Monitoring Field Activities Verification Checklist (continued)

Project	<u>Moab/Crescent Junction, Utah</u>	Date(s) of Air Sampling	<u>October through December 2010</u>
Date(s) of Verification	<u>November 22, 2010</u>	Name of Verifier	<u>Ed Baker/Melvin Capitan</u>
		Response (Yes, No, NA)	Comments
17. Were the true locations of the quality-control samples recorded in the Field Log Book?		Yes	
18. Were all samples collected as specified in the Sampling and Analysis Plan?		Yes	
19. Were chain of custody records completed, and was sample custody maintained?		Yes	
20. Are field data sheets signed and dated by sampling personnel?		Yes	
21. Was all other pertinent information documented on the field data sheets?		Yes	

4.0 References

Data Review and Validation Report for RIN 1101002, ALS Laboratory Group, Fort Collins, Colorado, February 21, 2011.

DOE (U.S. Department of Energy). Moab UMTRA Project *Environmental Air Monitoring Sampling and Analysis Plan* (DOE-EM/GJRAC1434), Revision 2, July, 2010.

DOE (U.S. Department of Energy) Order 5400.5, "Radiation Protection of the Public and Environment."

Preparation and Readout of Teledyne Isotopes TLD Card, TIML-TLD-01, Revision 7
Environmental, Inc., Midwest Laboratory, Teledyne Isotopes, 2001.

Quality Assurance Manual for Radon Monitoring Services, Revision Number 9, Landauer, Inc., March, 2004.

Moab Radioparticulate Concentration (Po-210)

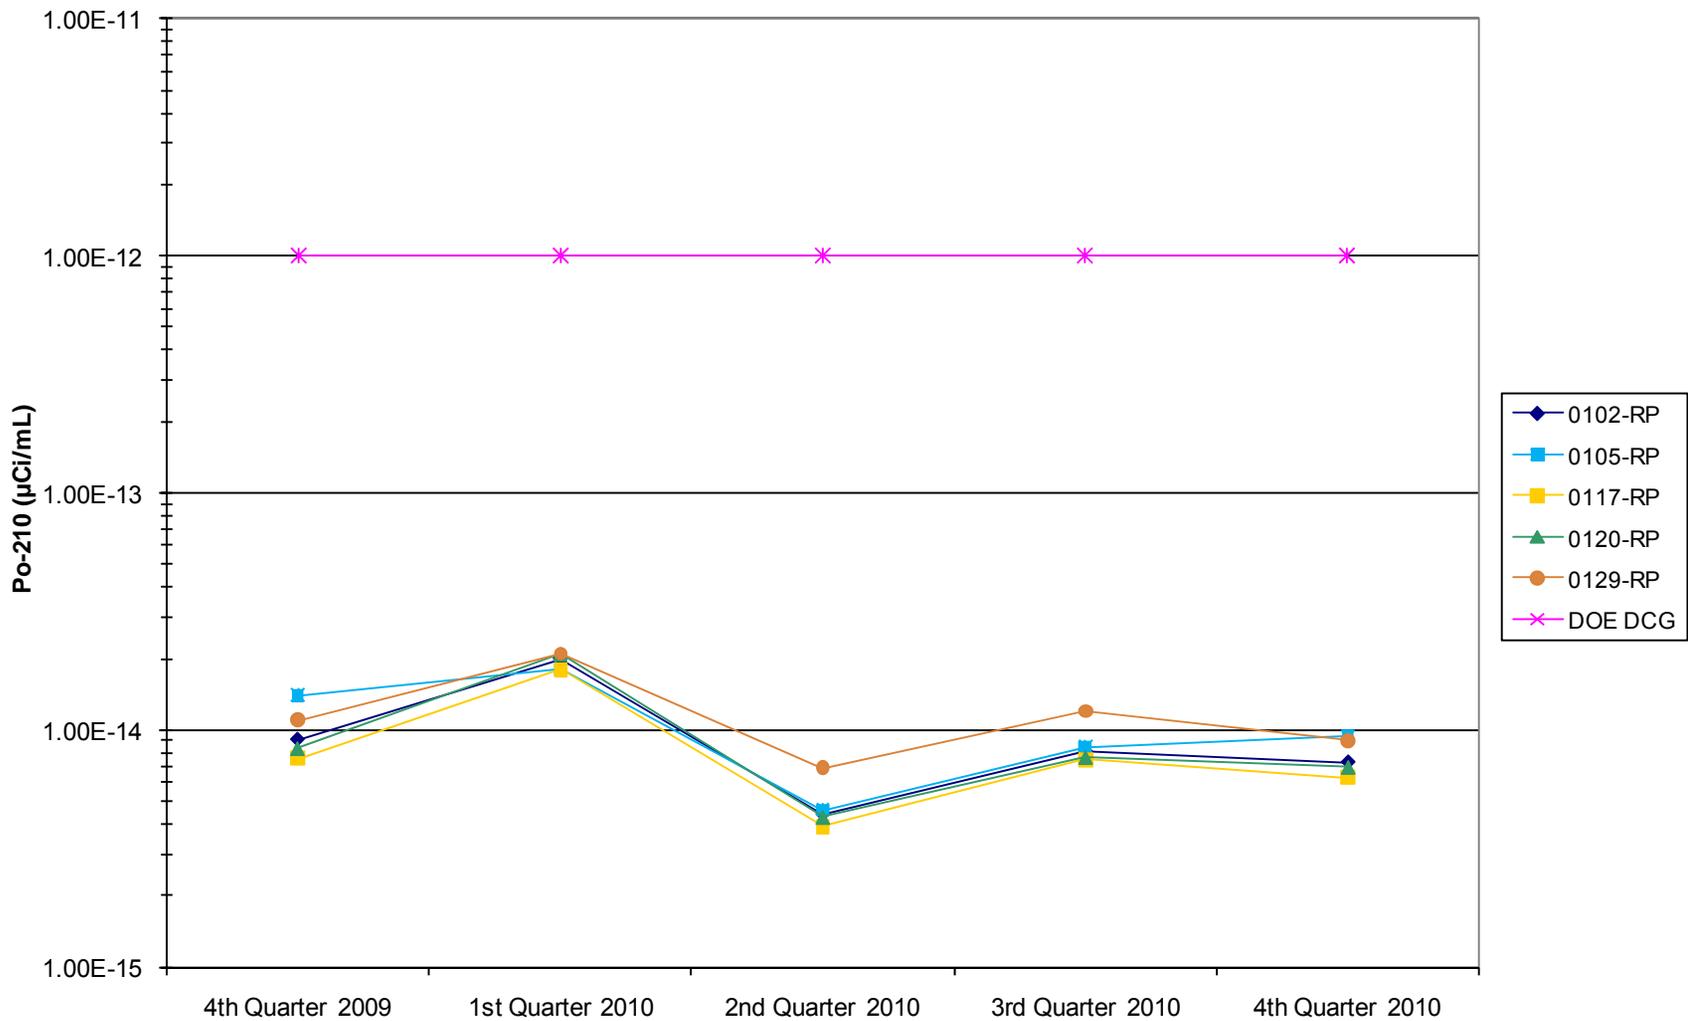


Figure 4. Moab Radioparticulate Concentration (Po-210)

Moab Radioparticulate Concentration (Th-230)

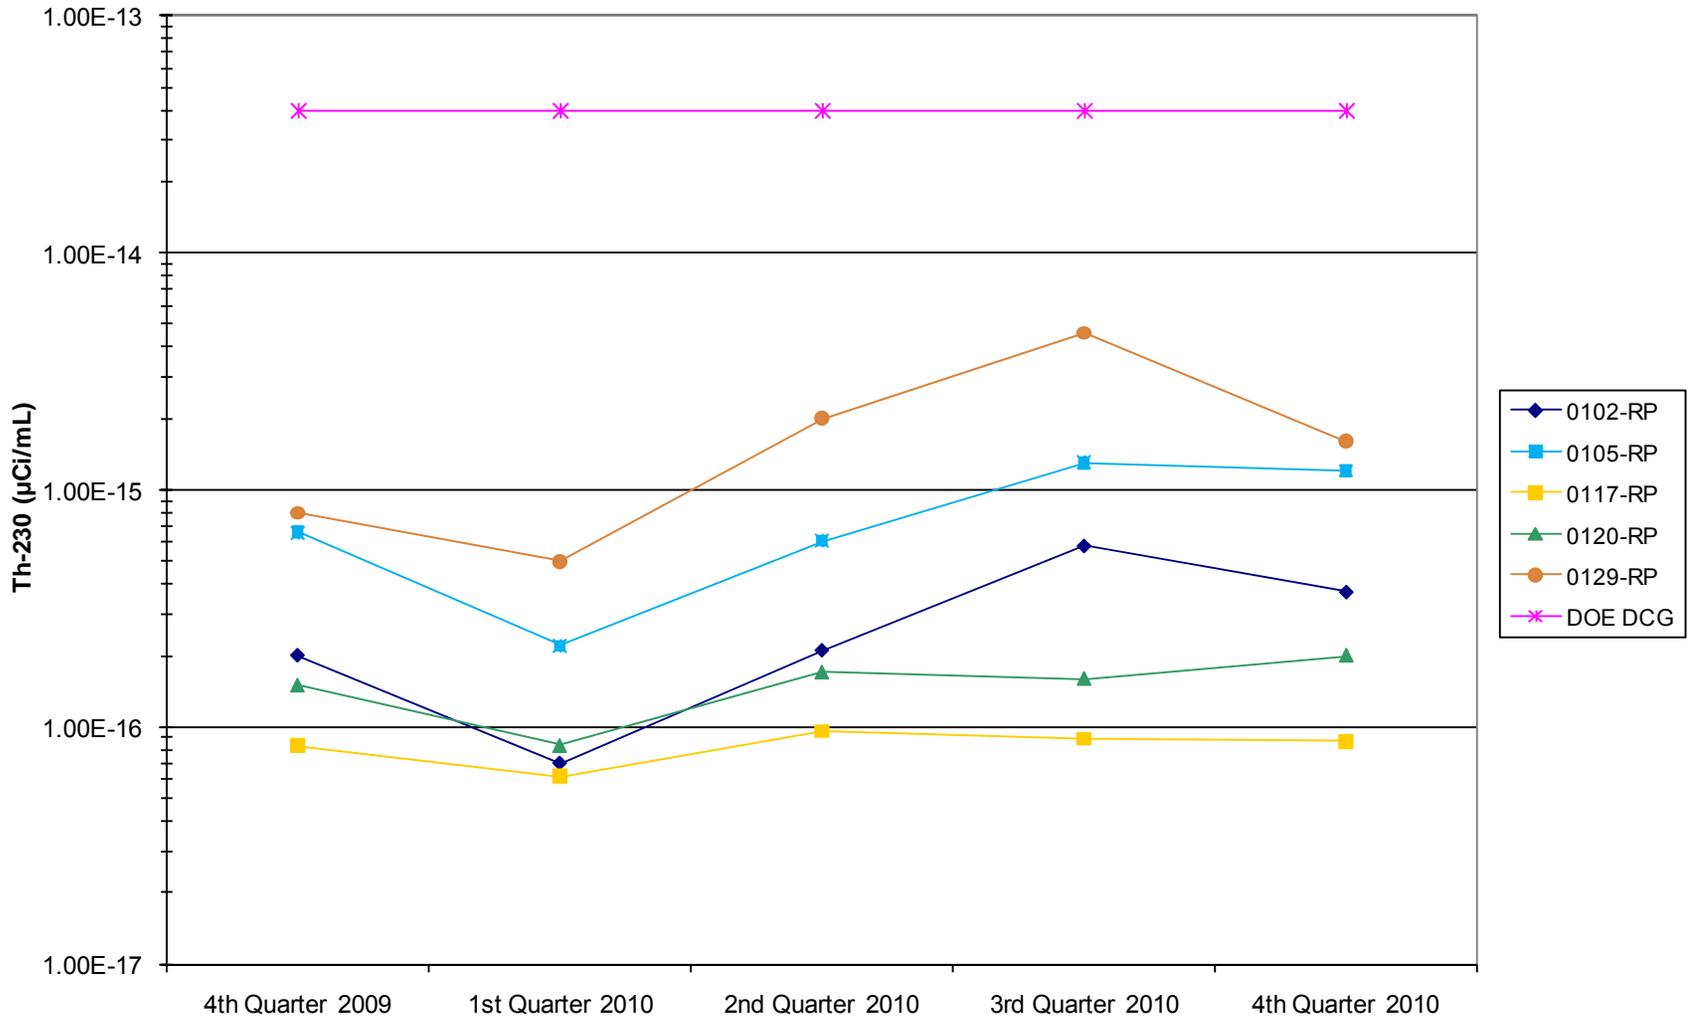


Figure 5. Moab Radioparticulate Concentration (Th-230)

Moab Radioparticulate Concentration (Ra-226)

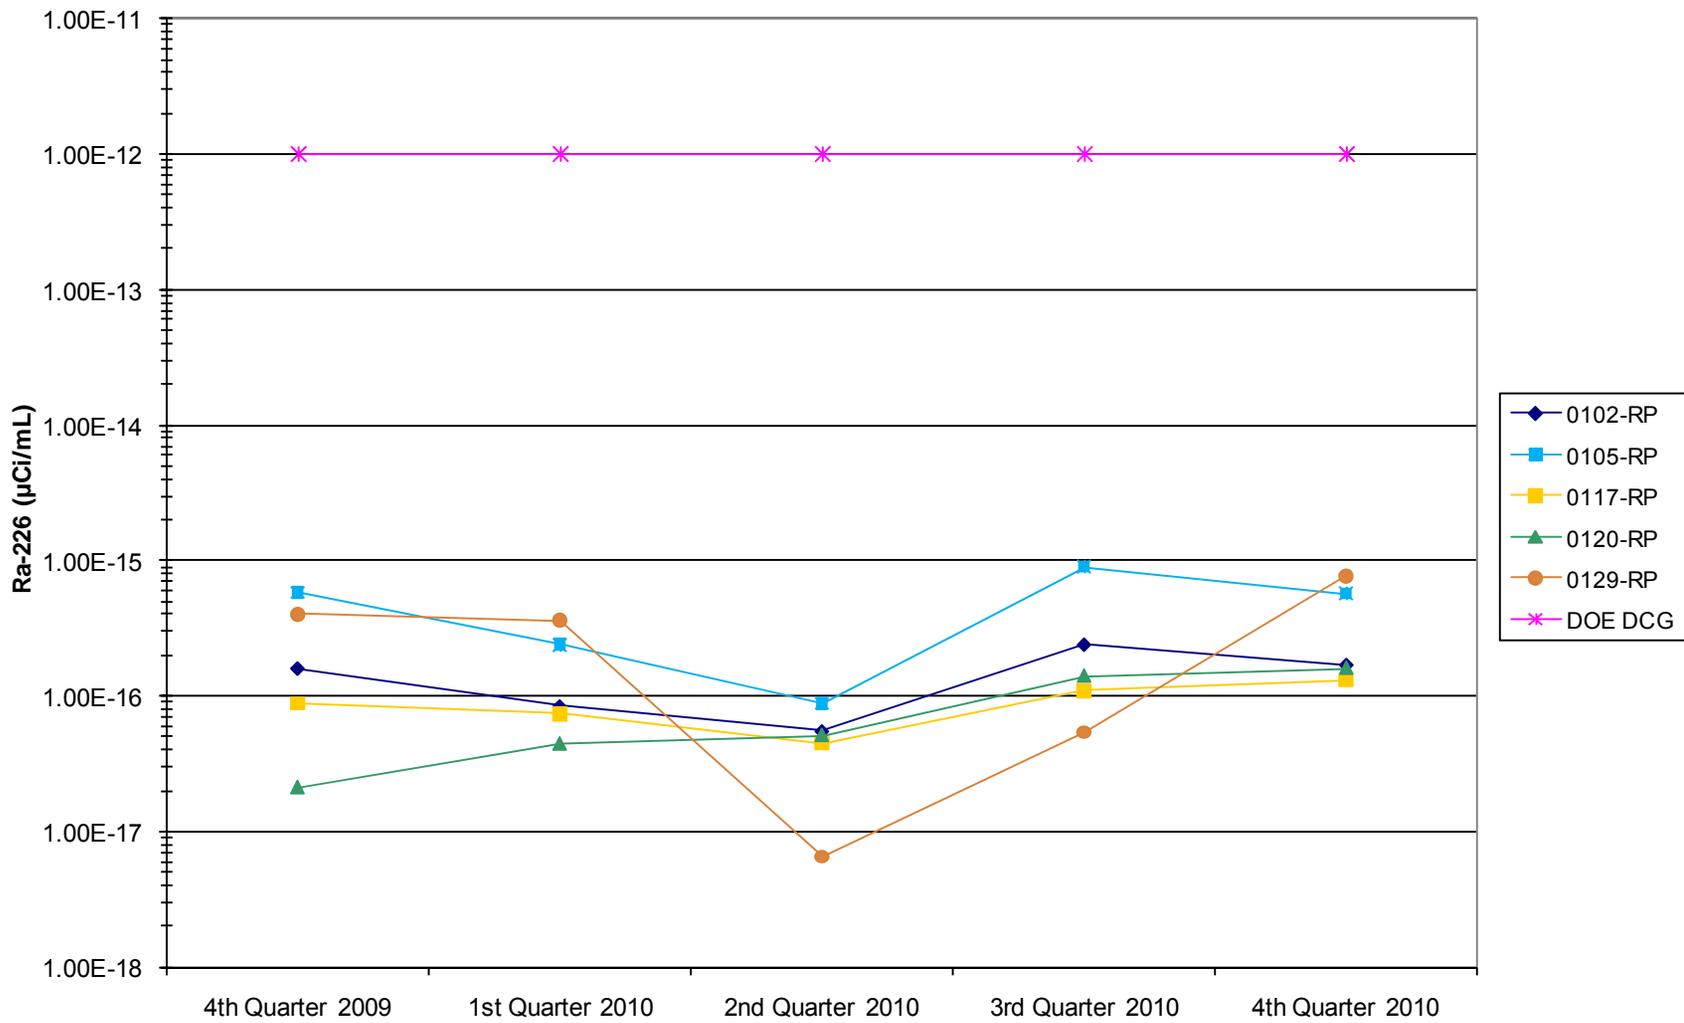


Figure 6. Moab Radioparticulate Concentration (Ra-226)

Moab Radioparticulate Concentration (Uranium)

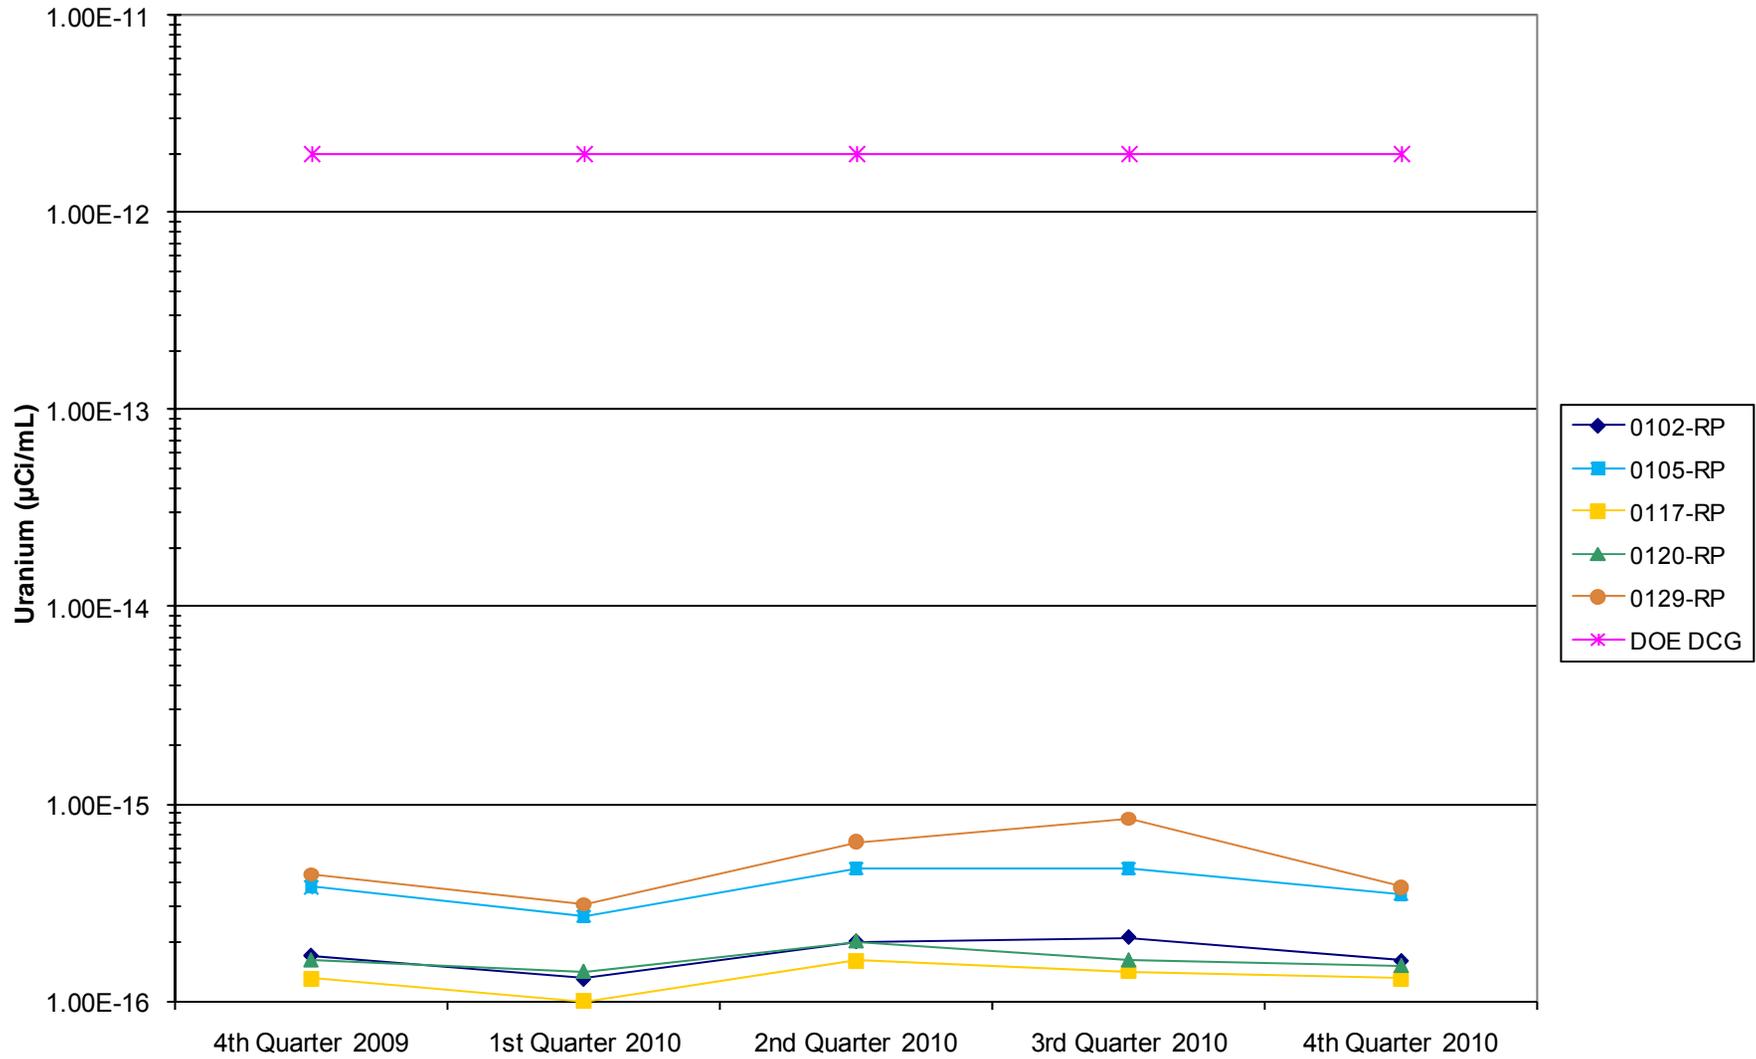


Figure 7. Moab Radioparticulate Concentration (Uranium)

Moab Atmospheric Radon-222 Concentration

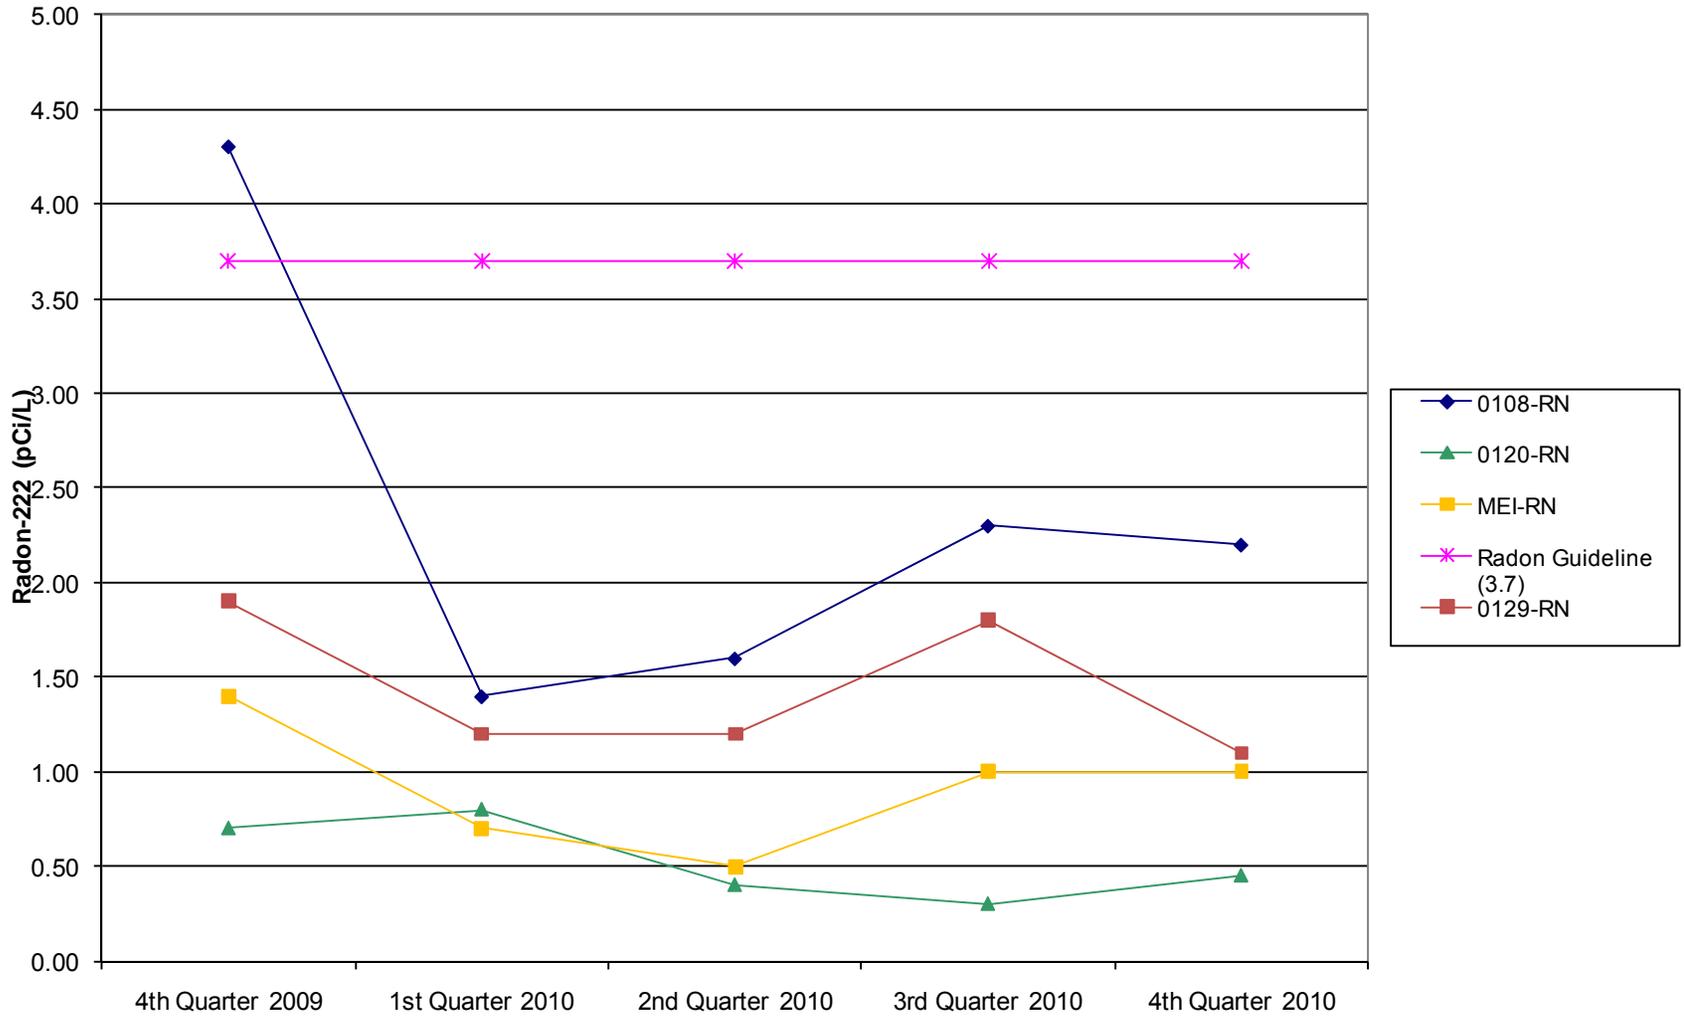


Figure 8. Moab Atmospheric Radon-222 Concentration

Moab Direct Gamma Radiation Dose

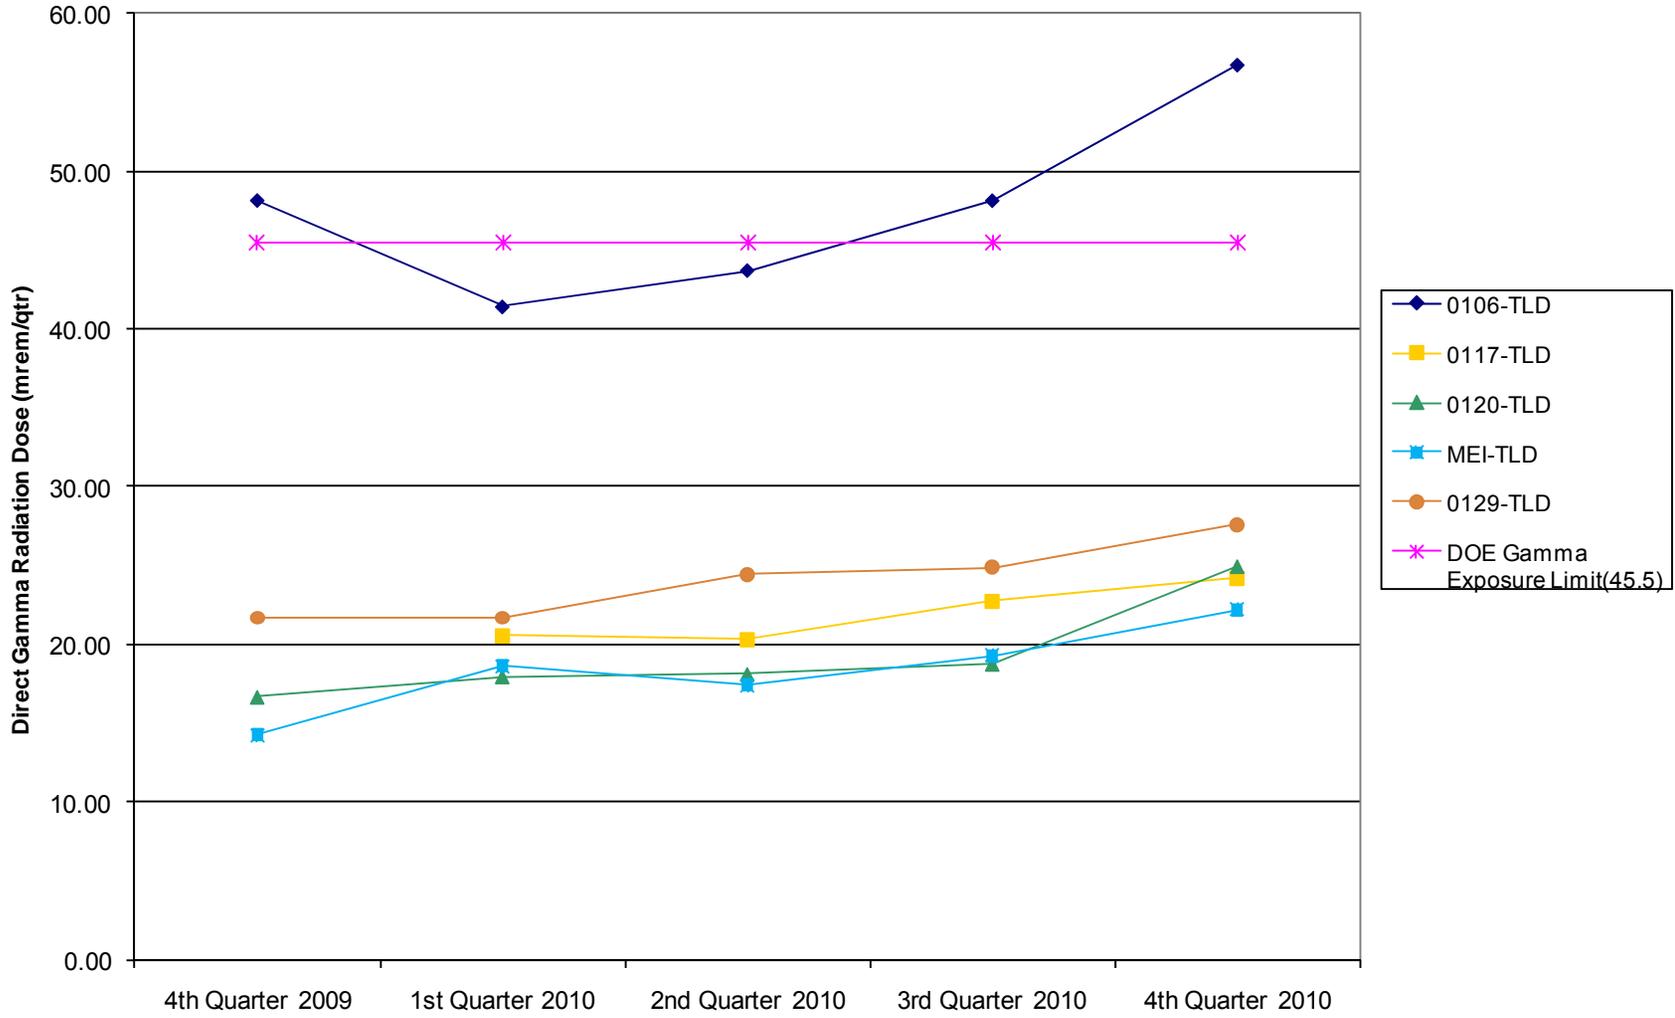


Figure 9. Moab Direct Gamma Radiation Dose

Crescent Junction Radioparticulate Concentration (Po-210)

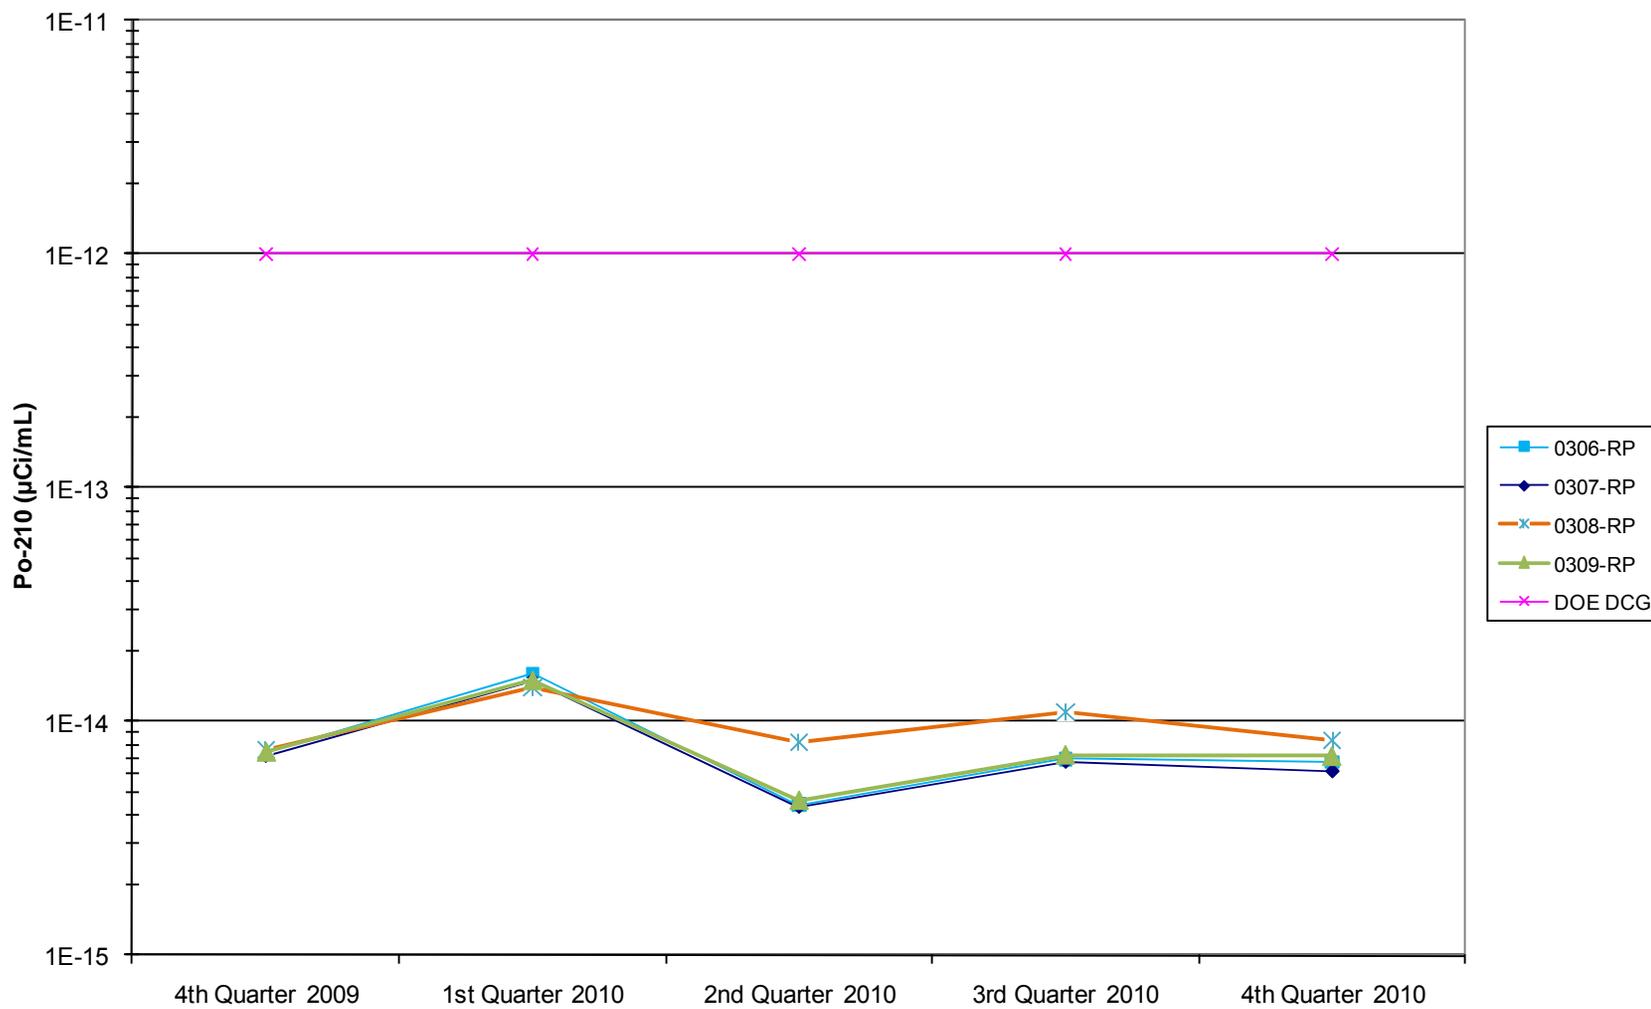


Figure 10. Crescent Junction Radioparticulate Concentration (Po-210)

Crescent Junction Radioparticulate Concentration (Th-230)

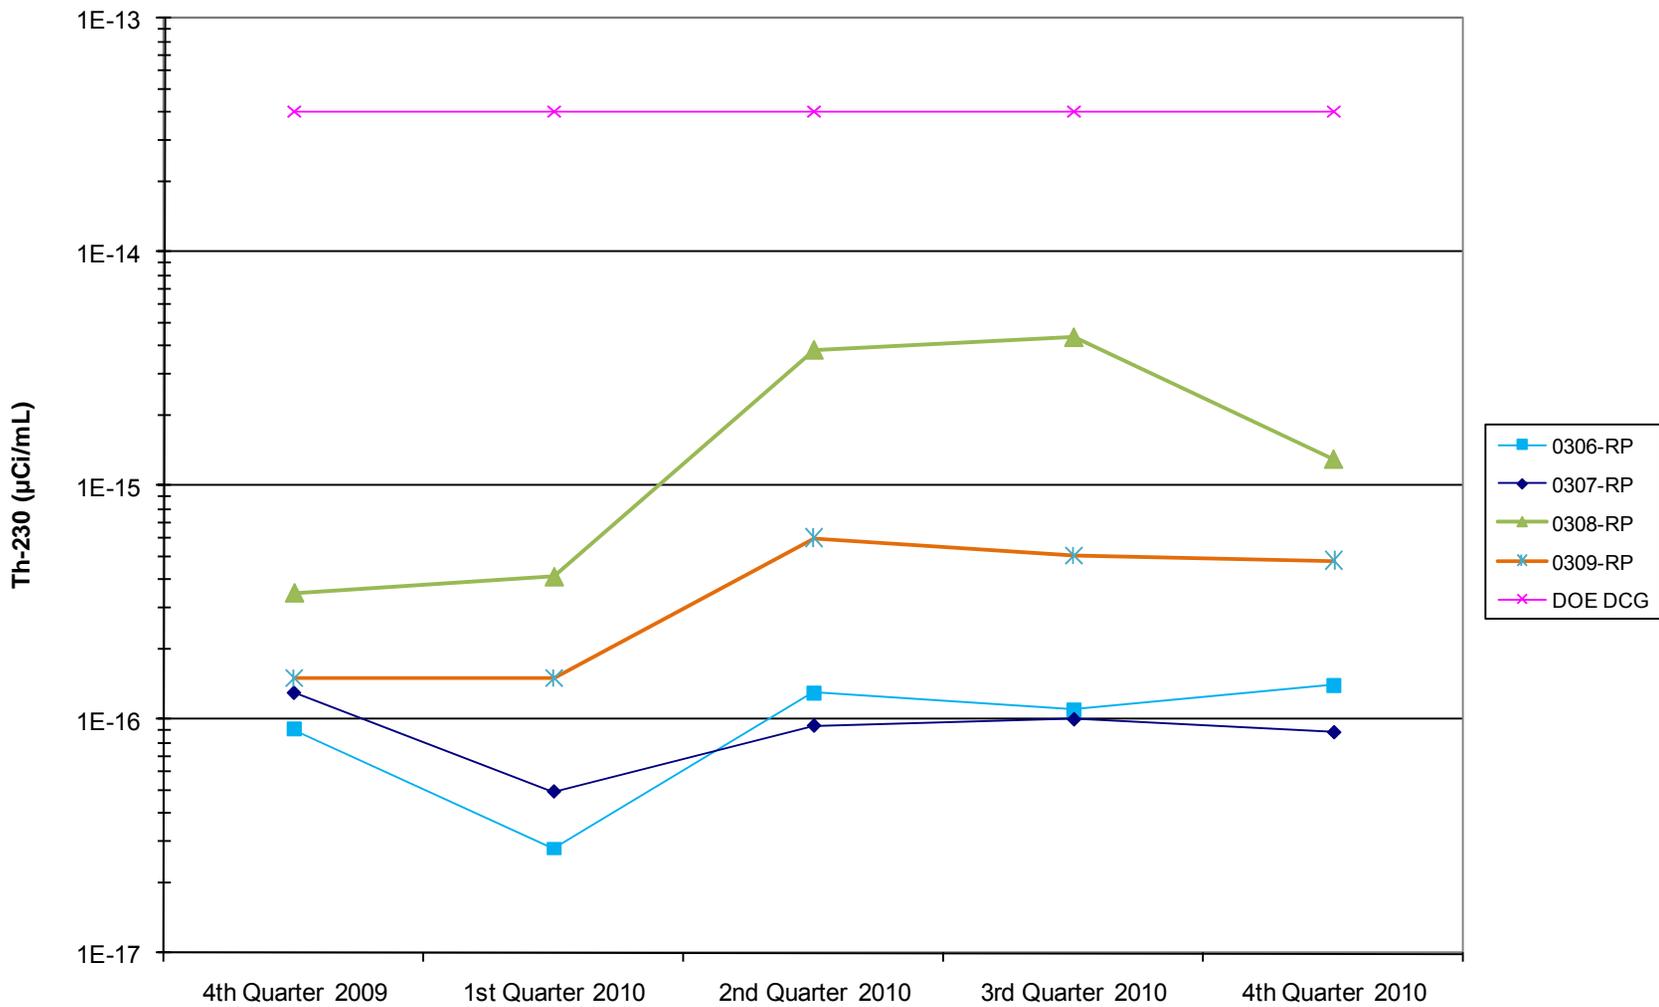


Figure 11. Crescent Junction Radioparticulate Concentration (Th-230)

Crescent Junction Radioparticulate Concentration (Ra-226)

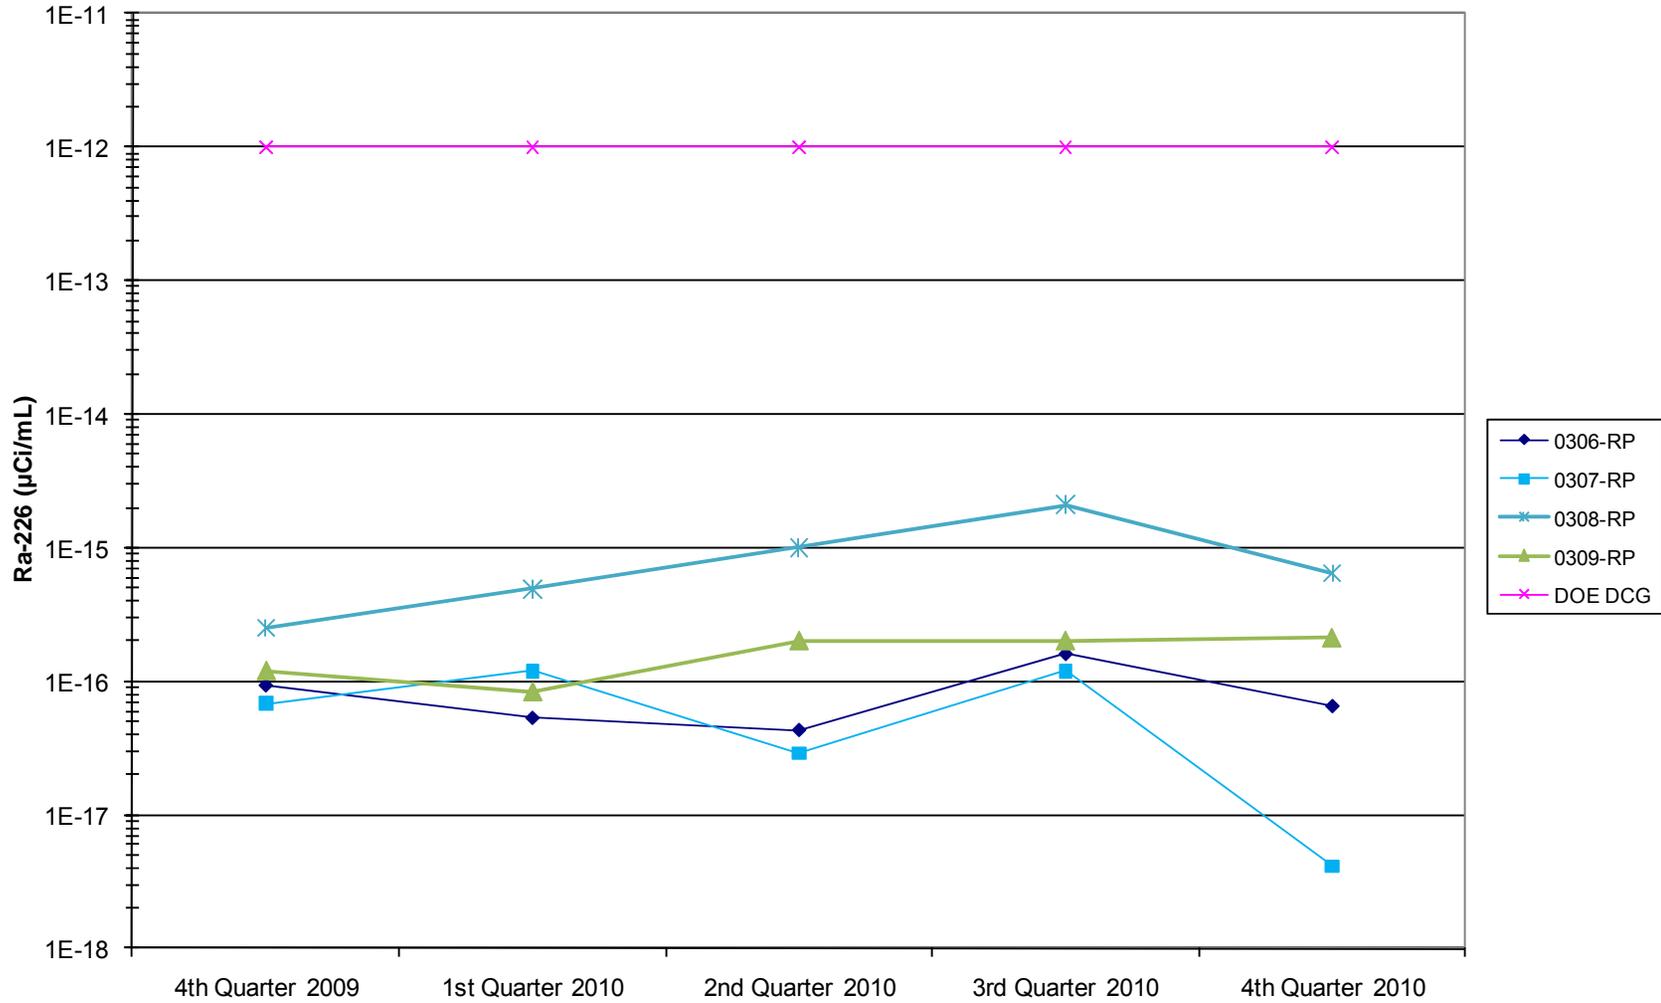


Figure 12. Crescent Junction Radioparticulate Concentration (Ra-226)

Crescent Junction Radioparticulate Concentration (Uranium)

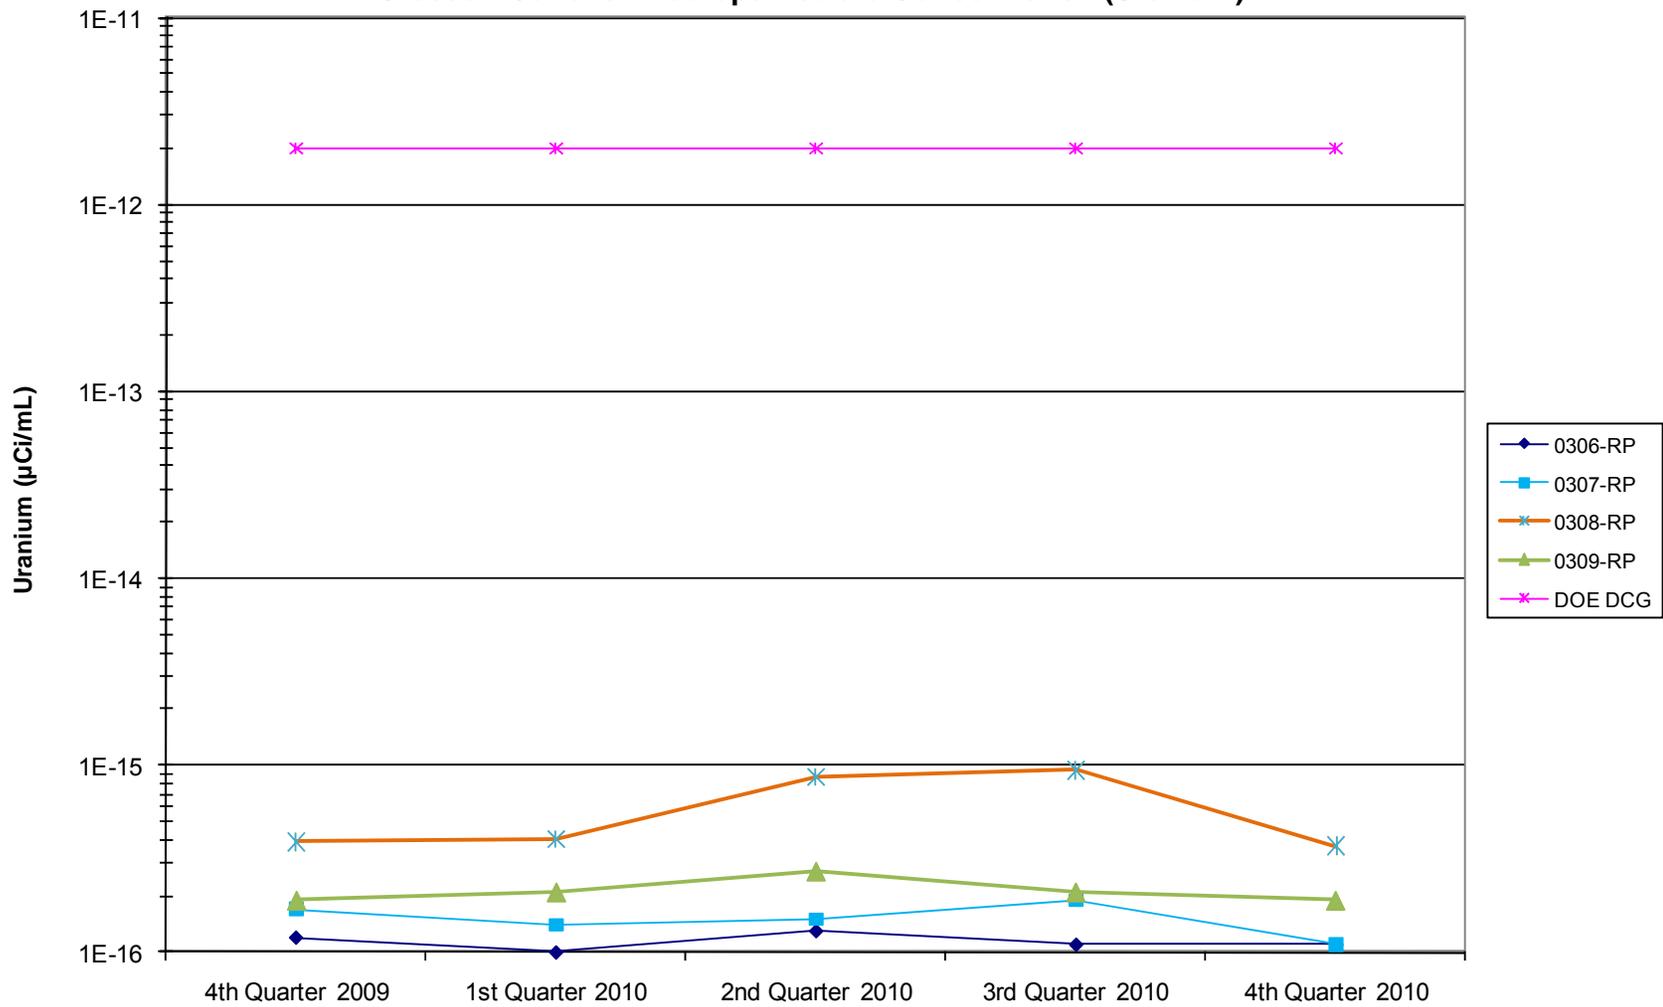


Figure 13. Crescent Junction Radioparticulate Concentration (Uranium)

Crescent Junction Atmospheric Radon-222 Concentration

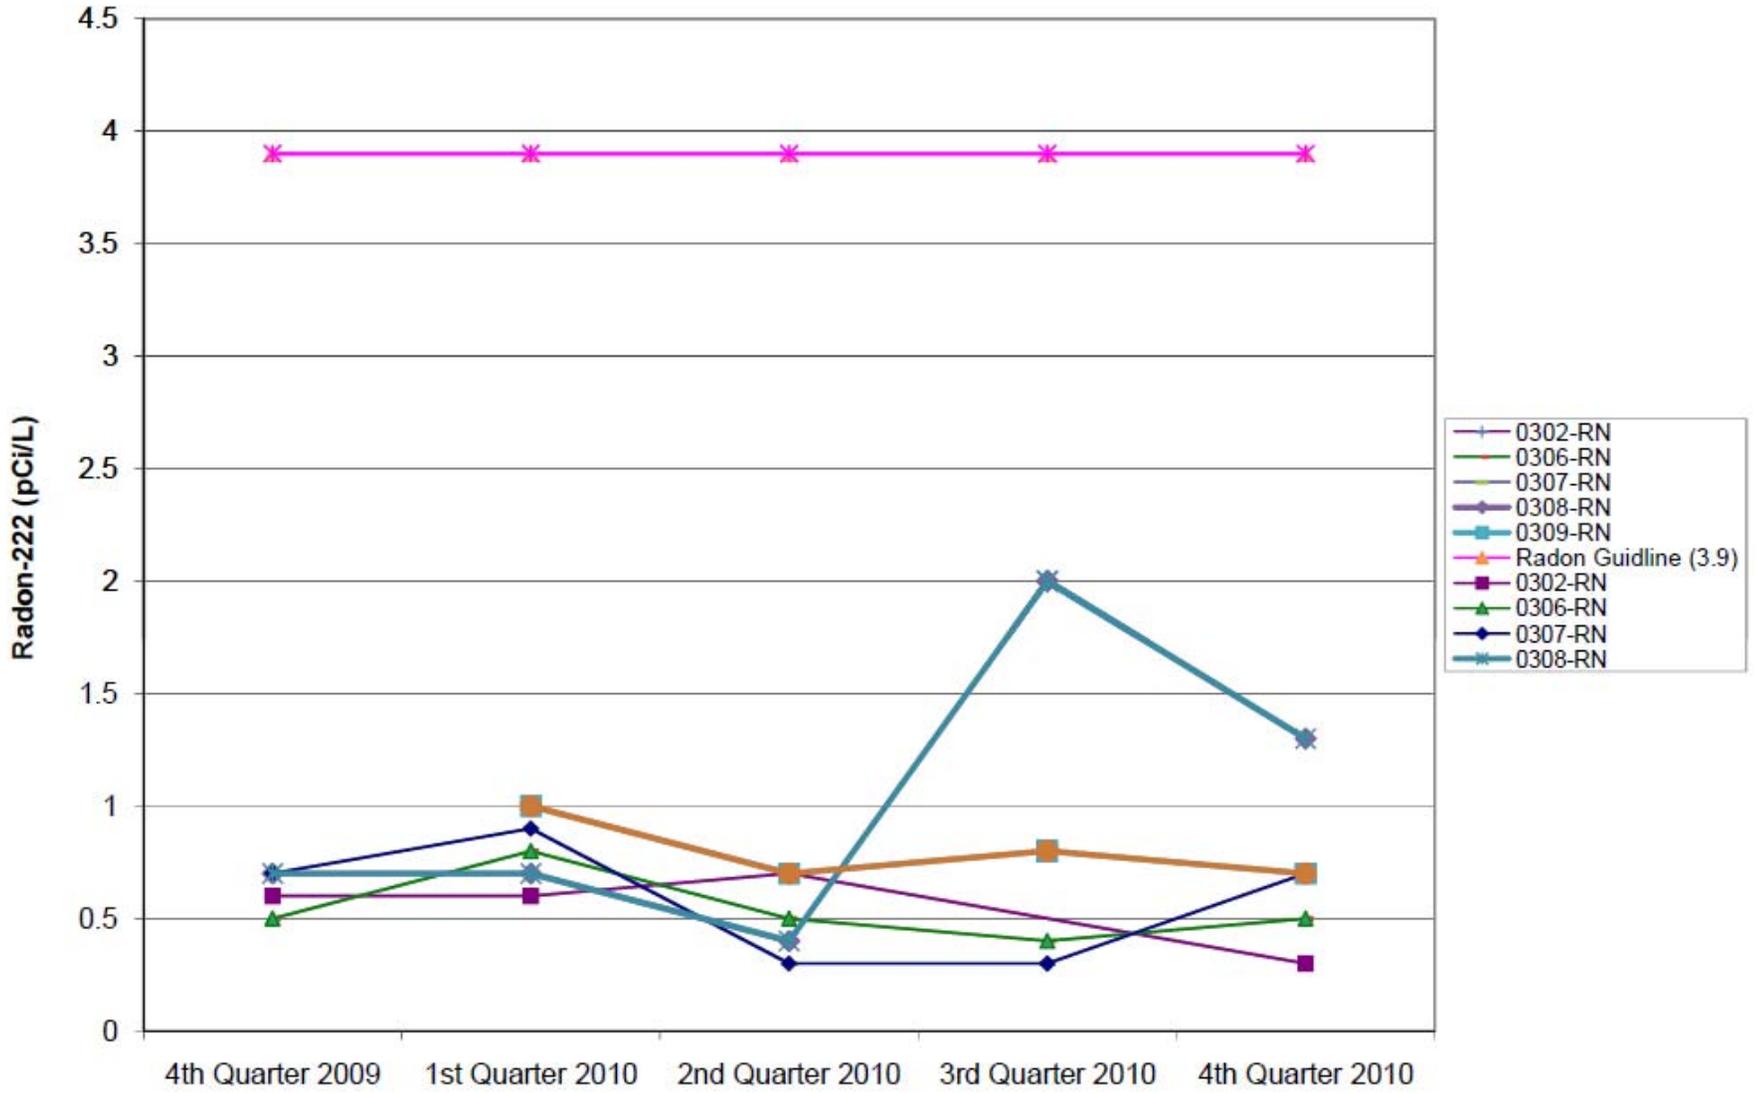


Figure 14. Crescent Junction Atmospheric Radon-222 Concentration

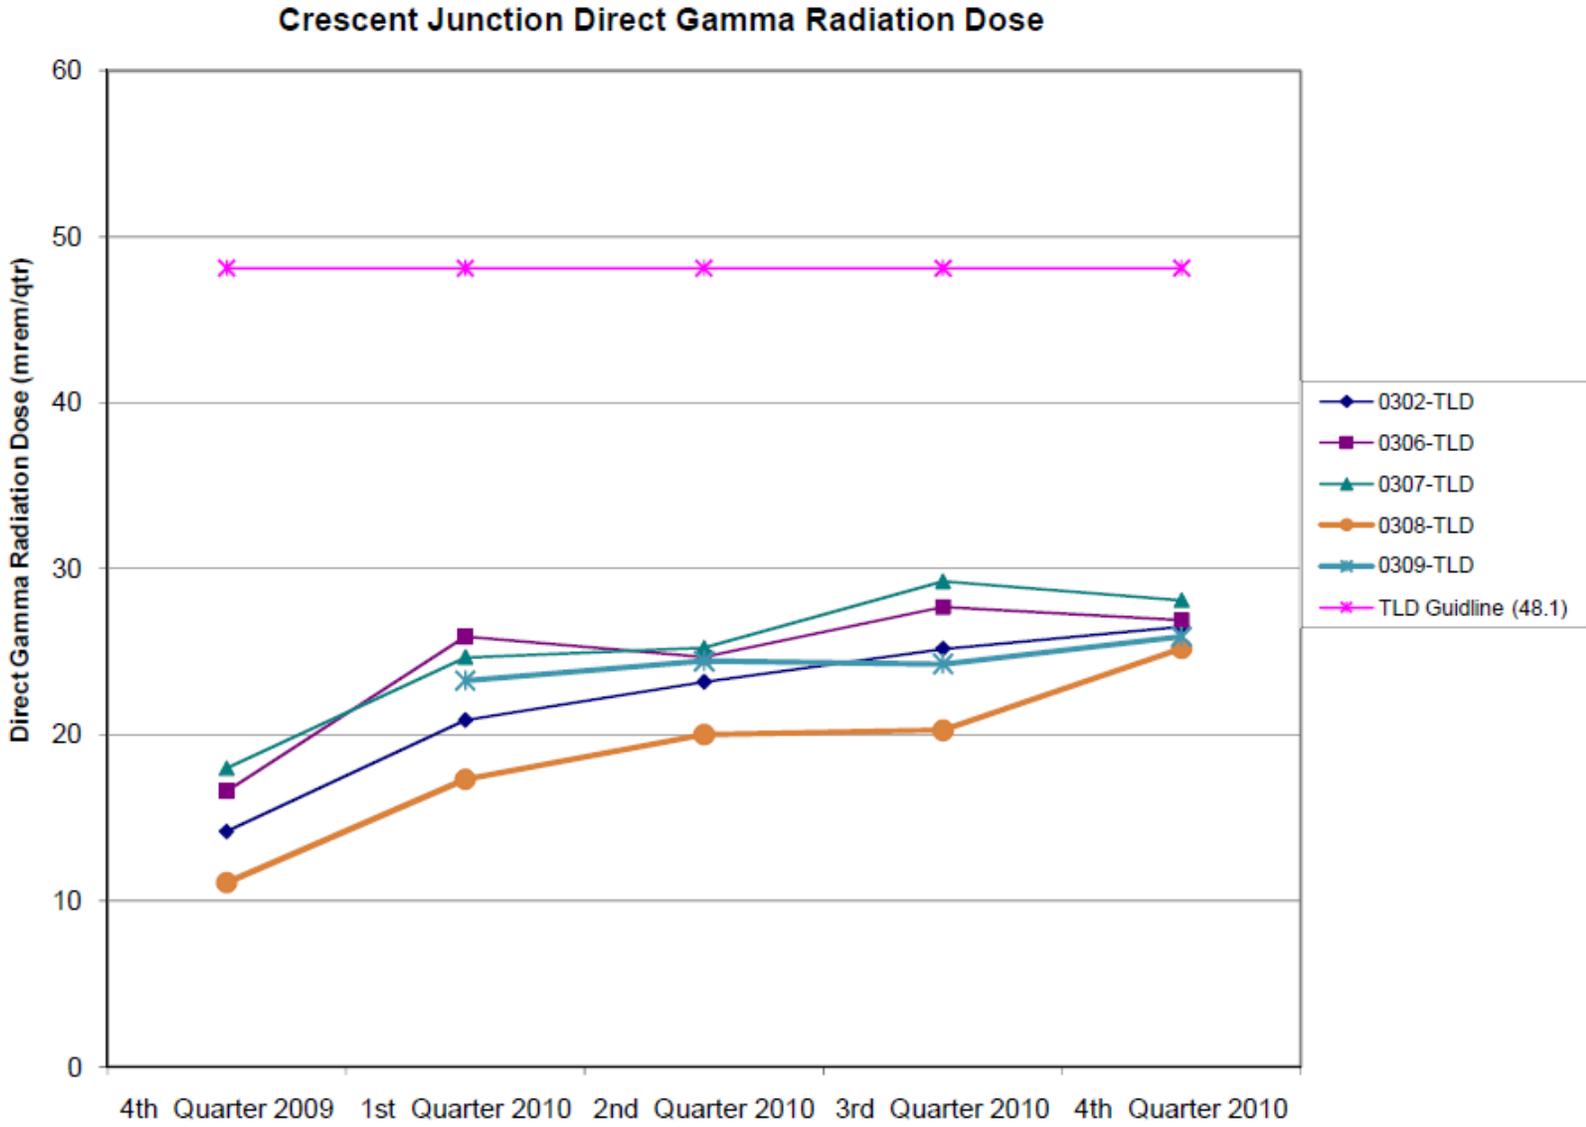


Figure 15. Crescent Junction Direct Gamma Radiation Dose